

Input data

System of measurement		Metric
Input type		Coupling for electric motor
Input speed	[rpm]	1400
Output speed	[rpm]	200
Ratio (i=)		7
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.37
Service factor		3
Rated Power P1	[kW]	1.11

Output data

Gear unit F RT 40 B3 7 71 B14 AC 19

Type		RT - Worm speed reducers
Input type		F (Elastic coupling)
Size		40
Ratio (i=)		7
Input flange		B14
Input speed	[rpm]	1400
Output speed	[rpm]	200
Rated output torque	[Nm]	15.02
Service Factor		3
Efficiency		0.85
Inertia moment	[kgm ²]	0.000022

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Universal
Version		B3

Output radial and axial loads





Ball bearings output radial load	[N]	1000
Taper bearings output radial load	[N]	1500
Ball bearings output axial load	[N]	200
Taper bearings output axial load	[N]	300

Accessories



Hollow output shaft		AC 19
---------------------	--	-------





Electric motor coupling

Size		71 B4
Poles n.		4
Power	[kW]	0.37

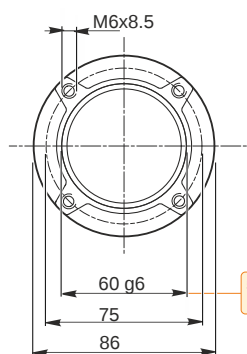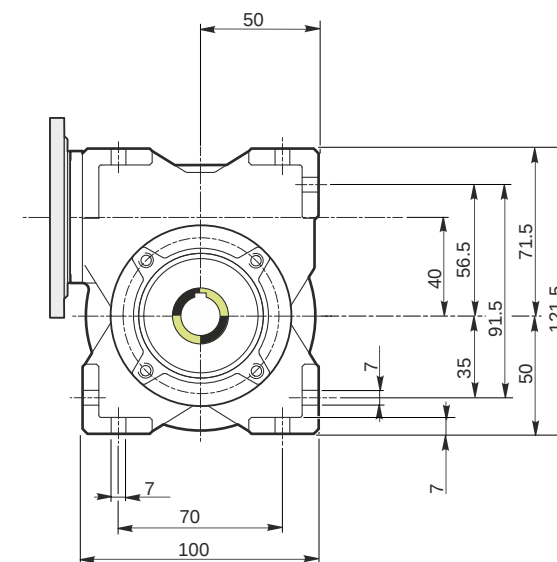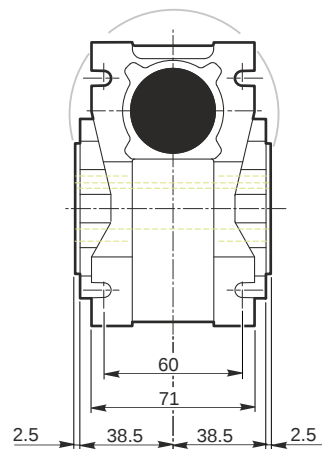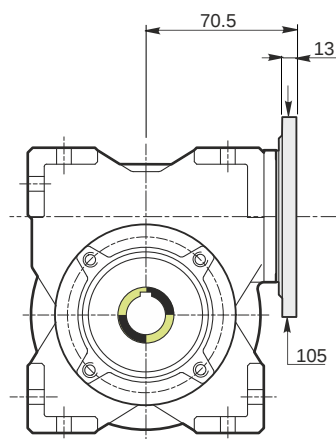


Hollow output shaft



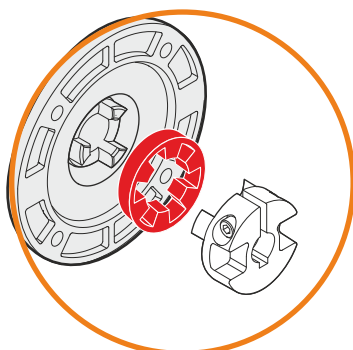


This gear unit is provided with an elastic coupling motor fitting

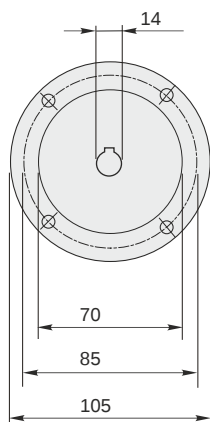


Mounting positions


B3




B6




B7




B8



V5



V6




0.08



Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

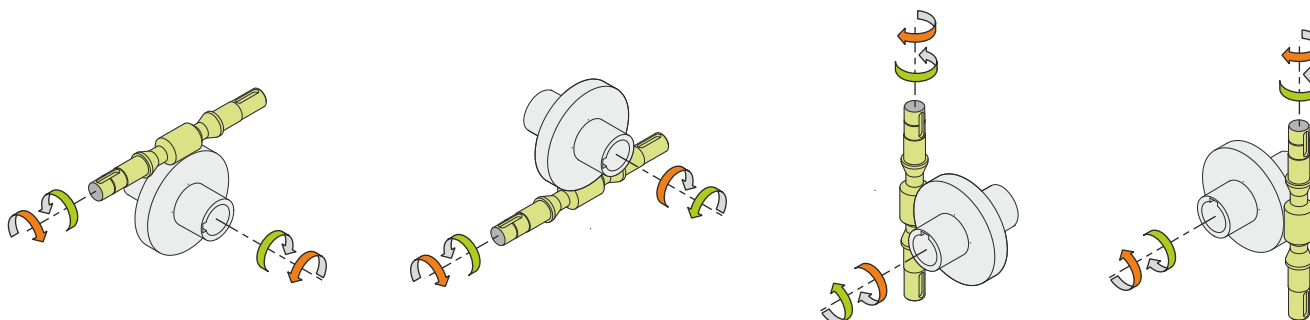

Weight

Gear unit [kg] 2.5

Gearing data

Axial module	2.1
Number of starts	4
Lead angle	21° 36'
Pressure angle	20°

Backdriving

Static back-driving
Quick back-driving
Dynamic back-driving