

### Input data

System of measurement		Metric
Input type		Coupling for electric motor
Input speed	[rpm]	1400
Output speed	[rpm]	200
Ratio (i=)		7
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.37
Service factor		3
Rated Power P1	[kW]	1.11

### Output data

#### **Gear unit** F RS 40 PC 7 71 B14 AC 19 B3

Type		RS - Worm speed reducers
Input type		F (Elastic coupling)
Size		40
Ratio (i=)		7
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	200
Rated output torque	[Nm]	15.02
Service Factor		3
Efficiency		0.85
Inertia moment	[kgm <sup>2</sup> ]	0.000022

#### **Gear unit configuration**

Output shaft		Hollow output shaft
Fixing		Shaft mounting
Version		PC

#### **Output radial and axial loads**





Ball bearings output radial load	[N]	1000
Taper bearings output radial load	[N]	1500
Ball bearings output axial load	[N]	200
Taper bearings output axial load	[N]	300

#### **Accessories**


Hollow output shaft		AC 19
---------------------	--	-------

#### **Electric motor coupling**

Size		71 B4
Poles n.		4
Power	[kW]	0.37

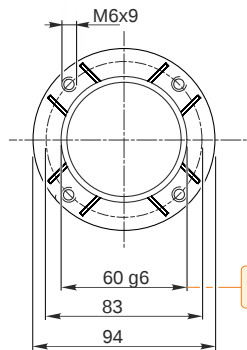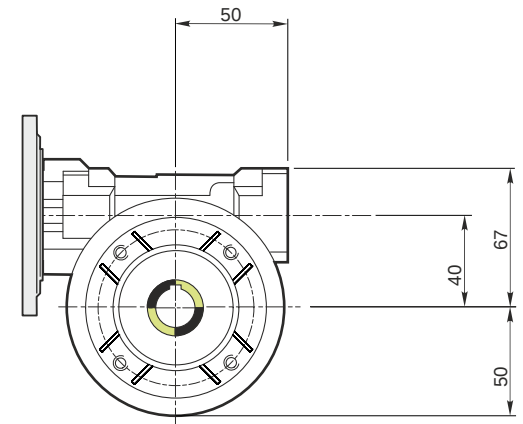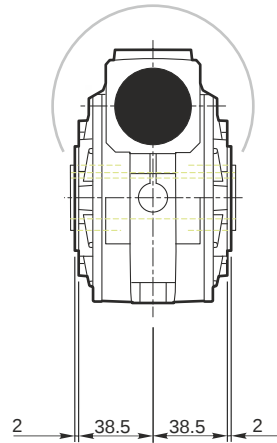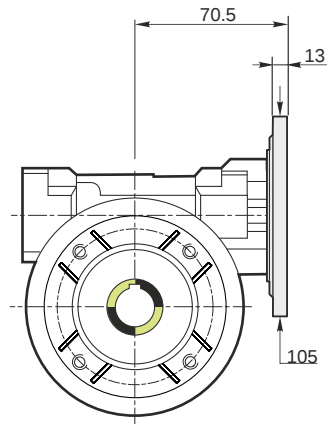




Hollow output shaft




59.99  
59.971

19.021  
19.000



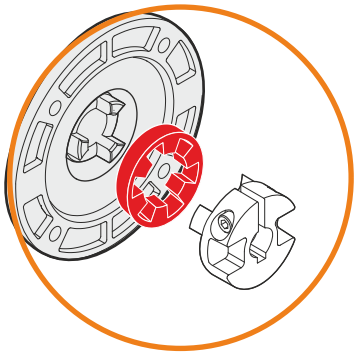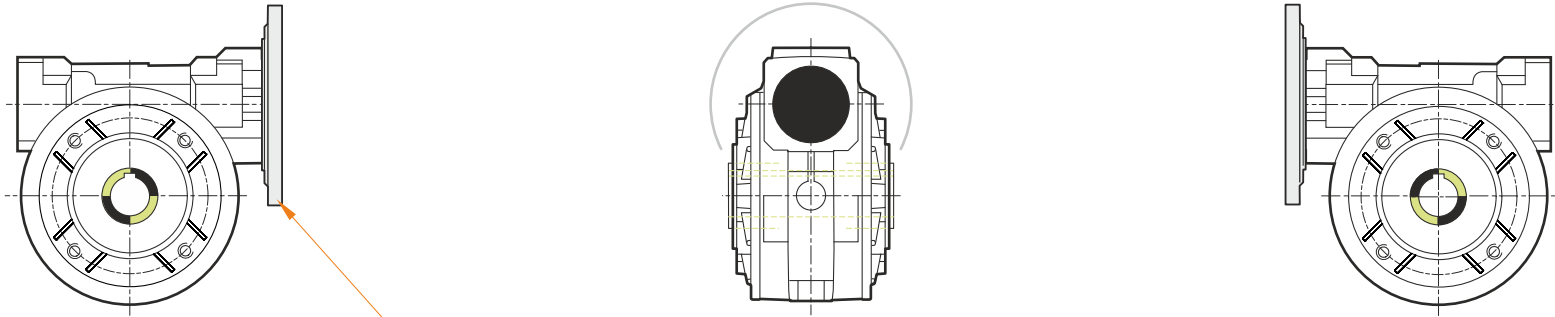


This gear unit is provided with an elastic coupling motor fitting

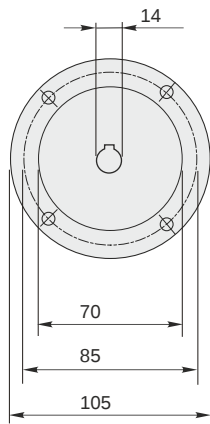


**Mounting positions**


**B3**




**B6**




**B7**




**B8**



**V5**



**V6**







0.08



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

**Direction of rotation**



**Weight**

Gear unit [kg] 2.5

**Gearing data**

Axial module	2.1
Number of starts	4
Lead angle	21° 36'
Pressure angle	20°

**Backdriving**

Static back-driving  
Quick back-driving  
Dynamic back-driving