

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	1.25
Ratio (i=)		1120
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.09
Service factor		0.8
Rated Power P1	[kW]	0.07

Output data

Gear unit **M RS/RS 28/50 S (bolted) 11 1120 56 B14 AC 24 MT 0.09 kW 56 B4 B14 X3 B3**

Type		RS/RS - Worm speed reducers
Input type		M
Size		28/50
Ratio (i=)		1120
Gearbox ratio		28.00
Pre-stage ratio		40.00
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	1.25
Rated output torque	[Nm]	213.16
Service Factor		0.8
Efficiency		0.31

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Feet
Version		S (bolted)
Attachment position		11

Output radial and axial loads

Ball bearings output radial load	[N]	3200
Taper bearings output radial load	[N]	4200
Ball bearings output axial load	[N]	640
Taper bearings output axial load	[N]	840

Accessories




Hollow output shaft		AC 24
---------------------	--	-------

Electric motor




Size		56 B4
Poles		4
Power	[kW]	0.09

Electric motor configuration

Motor flange		B14
Terminal box position		X3

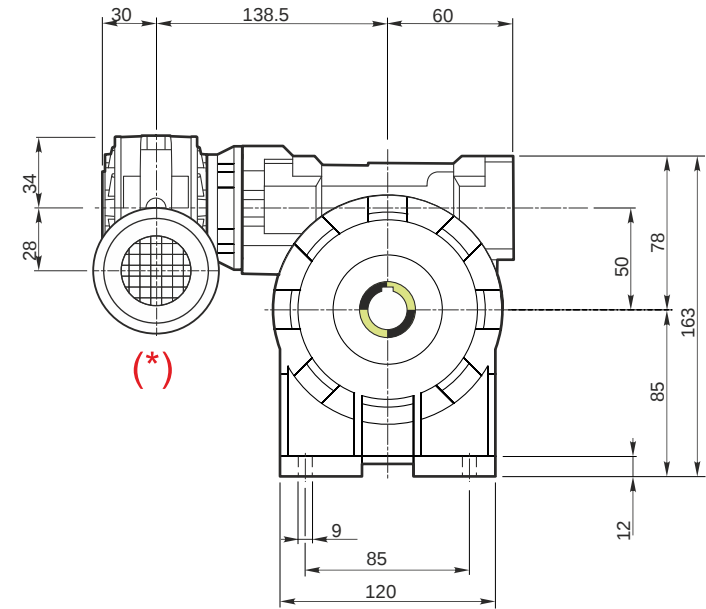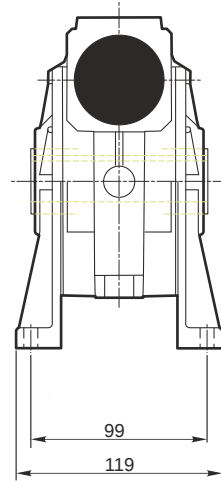
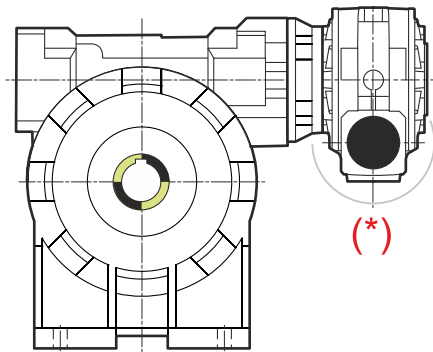


Hollow output shaft

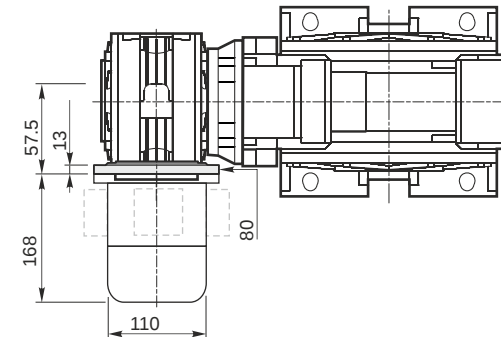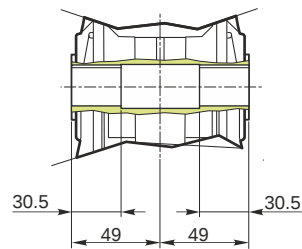


M RS/RS 28/50 S (bolted) 11 1120 56 B14 AC 24 MT 0.09 kW 56 B4 B14 X3 B3

Mounting positions

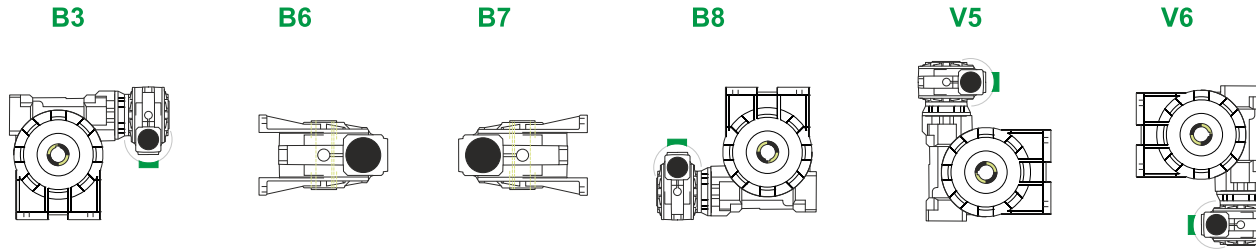


0.03	1
0.13	2




Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Attachment position

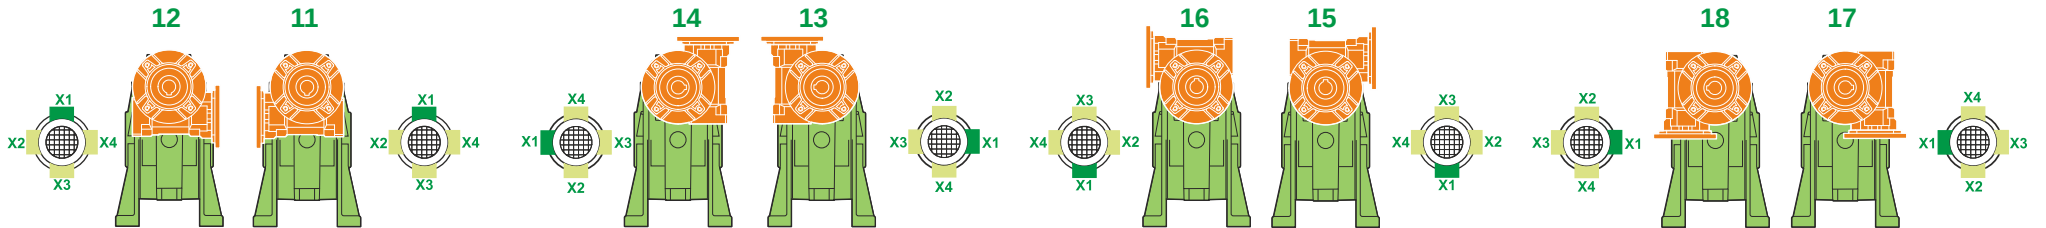

Direction of rotation

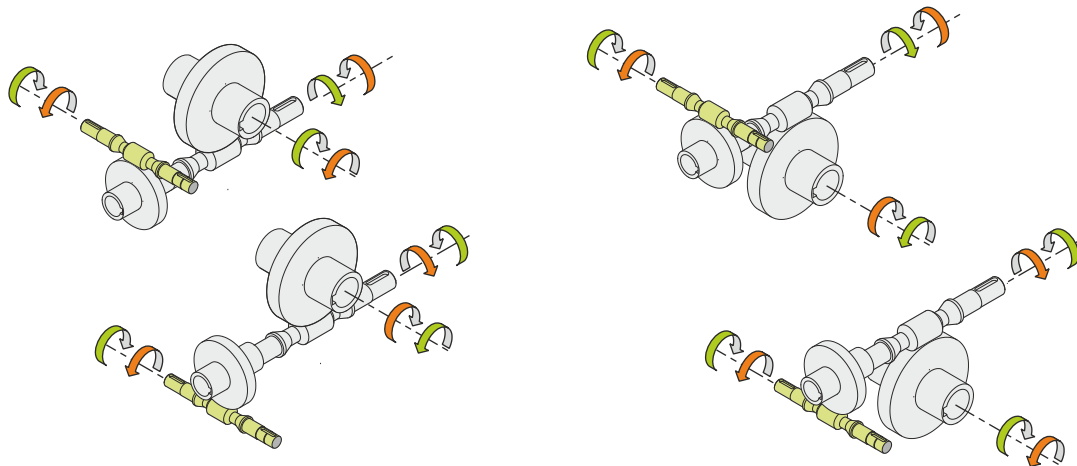

Weight

Gear unit [kg]	5.2
Electric motor [kg]	2.6

Gearing data 2



Axial module	2.7
Number of starts	1
Lead angle	1
Pressure angle	20° 19'

Backdriving

- Static self-locking
- Slow back-driving in case of vibrations
- Low dynamic back-driving

M RS/RS 28/50 S (bolted) 11 1120 56 B14 AC 24 MT 0.09 kW 56 B4 B14 X3 B3