

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	8.09
Ratio (i=)		173.04
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.18
Service factor		1.2
Rated Power P1	[kW]	0.21

Output data

Gear unit	M RA 63/50 PC 10 173.04 63 B14 AC 24 MT 0.18 kW 63 B4 B14 X3 B3
------------------	--

Type		RA - Worm speed reducers
Input type		M
Size		63/50
Ratio (i=)		173.04
Gearbox ratio		28.00
Pre-stage ratio		6.18
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	8.09
Rated output torque	[Nm]	116.86
Service Factor		1.2
Efficiency		0.55
Inertia moment	[kgm ²]	0.000023

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Shaft mounting
Version		PC
Attachment position		10

Output radial and axial loads

Ball bearings output radial load	[N]	3200
Taper bearings output radial load	[N]	4200
Ball bearings output axial load	[N]	640
Taper bearings output axial load	[N]	840

Accessories




Hollow output shaft		AC 24
---------------------	--	-------

Electric motor

Size		63 B4
Poles		4
Power	[kW]	0.18

Electric motor configuration


Motor flange		B14
Terminal box position		X3

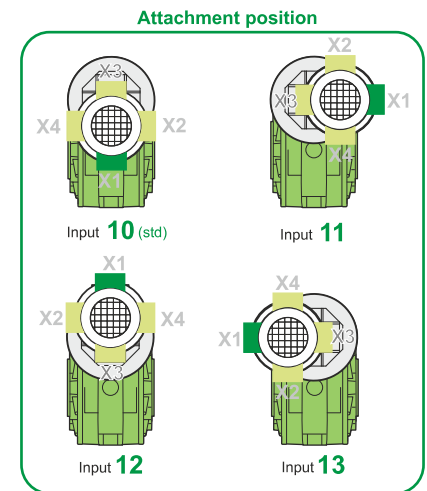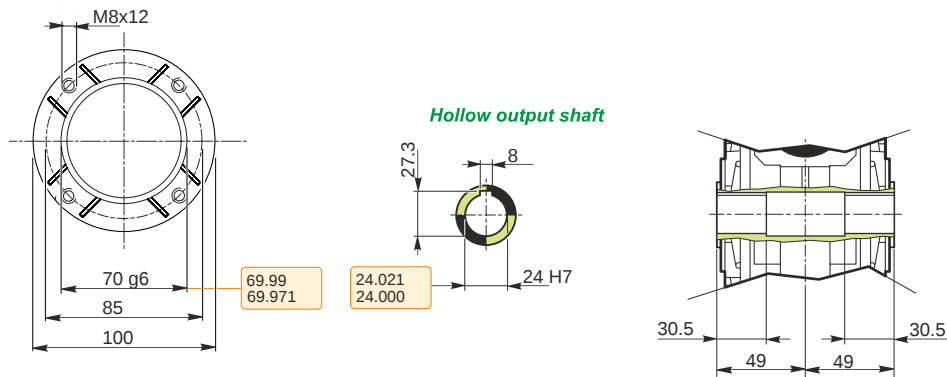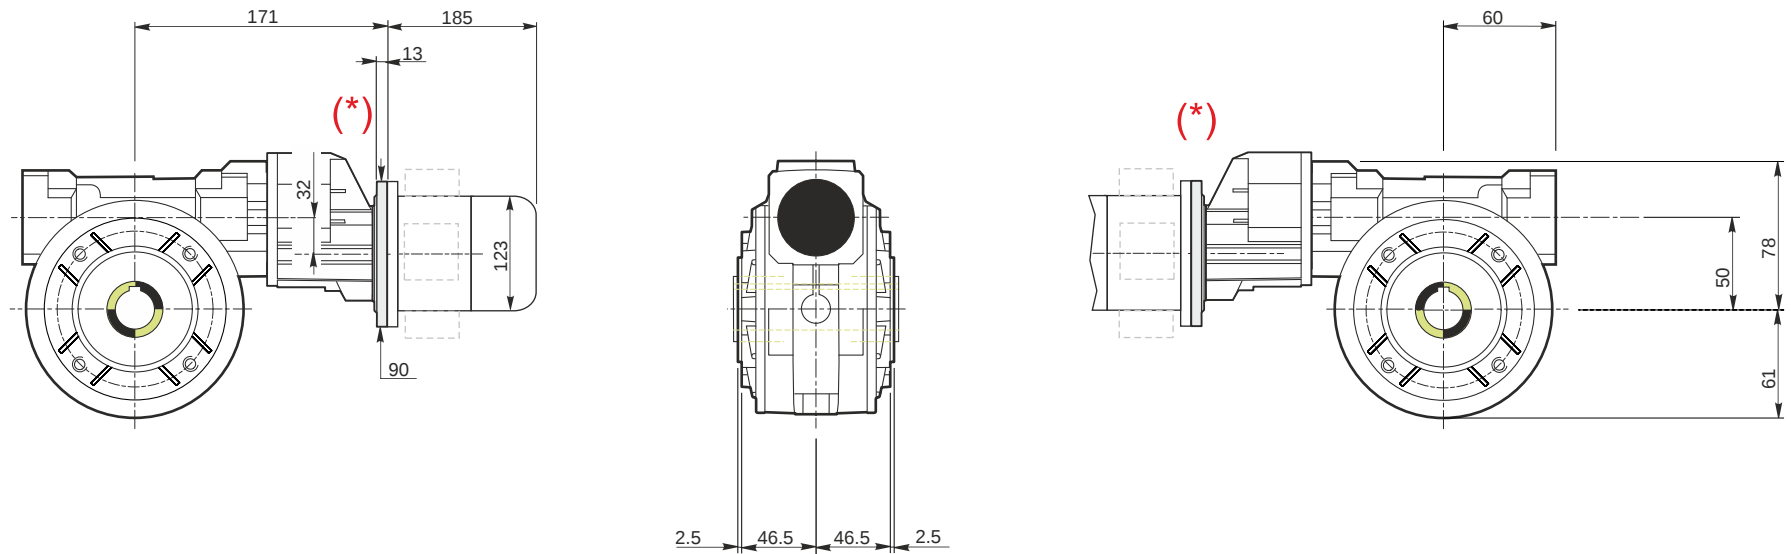


M RA 63/50 PC 10 173.04 63 B14 AC 24 MT 0.18 kW 63 B4 B14 X3 B3

Mounting positions


B3




B6




B7



B8




V5



V6



Terminal box position




0.04

1

0.13





2



Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

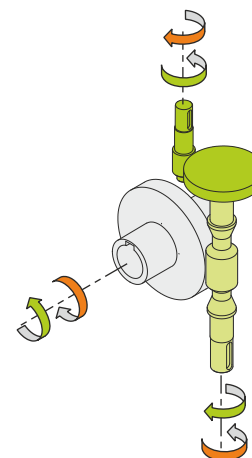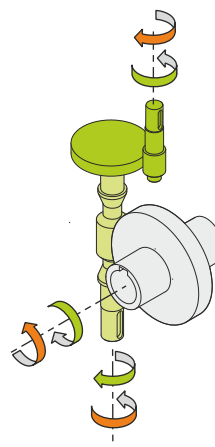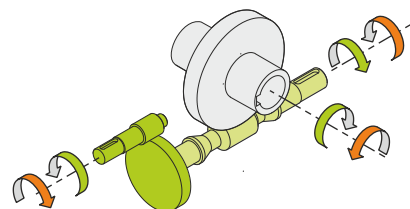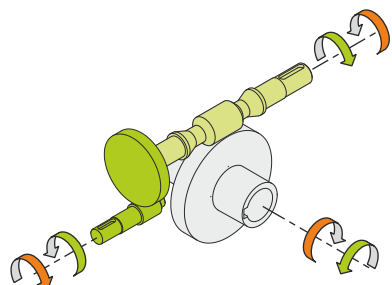

Weight

Gear unit [kg]	5.3
Electric motor [kg]	4.3

Gearing data

Axial module	2.7
Number of starts	1
Lead angle	6° 19'
Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving

M RA 63/50 PC 10 173.04 63 B14 AC 24 MT 0.18 kW 63 B4 B14 X3 B3