

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	4.05
Ratio (i=)		346.08
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.09
Service factor		1.1
Rated Power P1	[kW]	0.1

Output data

Gear unit	M RA 63/50 PC 10 346.08 56 B14 AC 24 MT 0.09 kW 56 B4 B14 X3 B3
------------------	--

Type		RA - Worm speed reducers
Input type		M
Size		63/50
Ratio (i=)		346.08
Gearbox ratio		56.00
Pre-stage ratio		6.18
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	4.05
Rated output torque	[Nm]	89.24
Service Factor		1.1
Efficiency		0.42
Inertia moment	[kgm ²]	0.000023

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC
Attachment position	10

Output radial and axial loads

Ball bearings output radial load	[N]	3200
Taper bearings output radial load	[N]	4200
Ball bearings output axial load	[N]	640
Taper bearings output axial load	[N]	840

Accessories




Hollow output shaft	AC 24
---------------------	-------

Electric motor

Size		56 B4
Poles		4
Power	[kW]	0.09


Electric motor configuration

Motor flange	B14
Terminal box position	X3

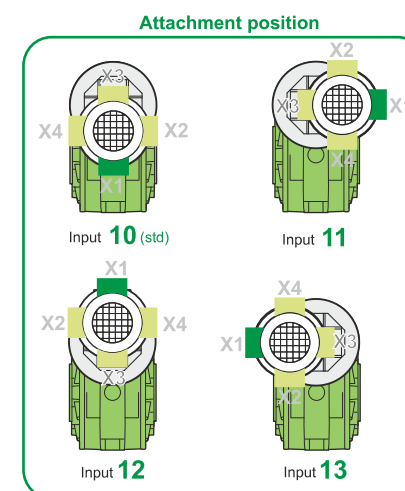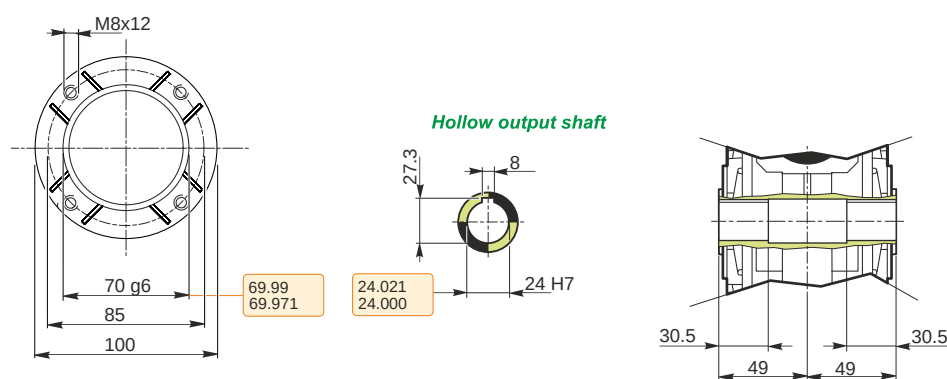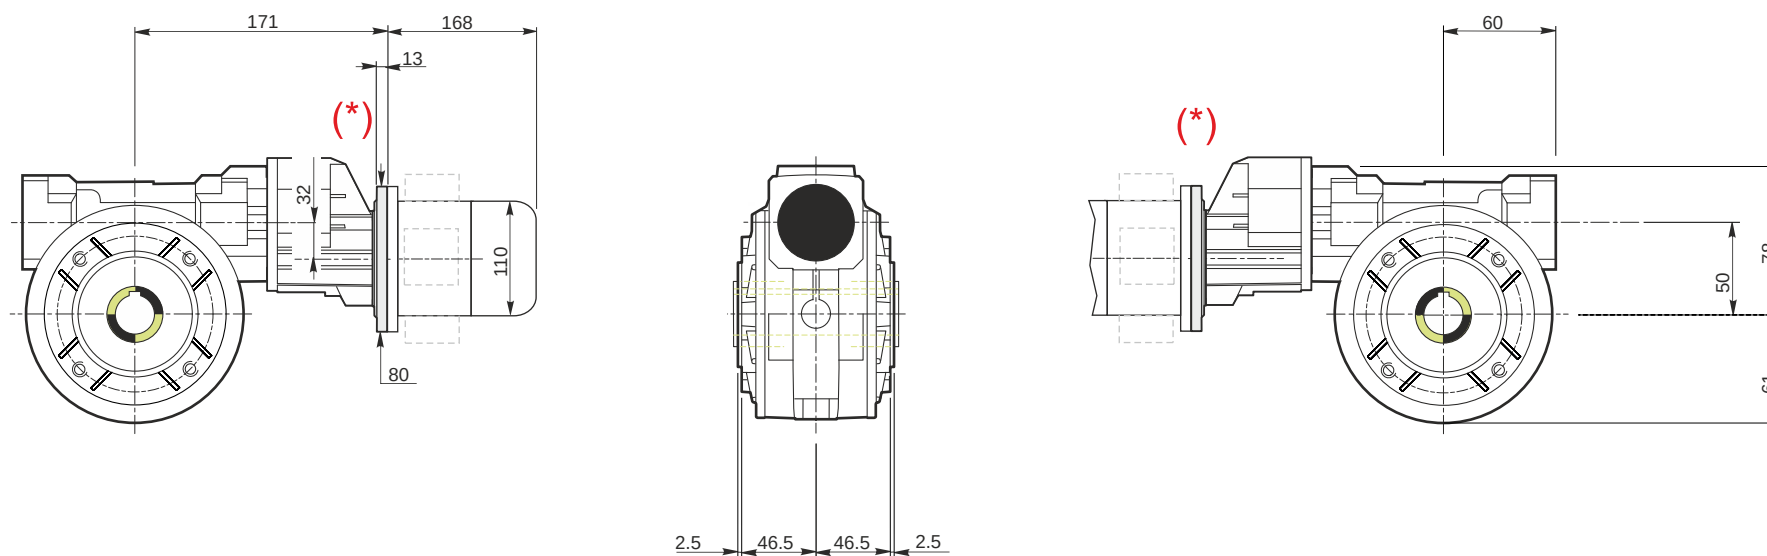


M RA 63/50 PC 10 346.08 56 B14 AC 24 MT 0.09 kW 56 B4 B14 X3 B3

Mounting positions

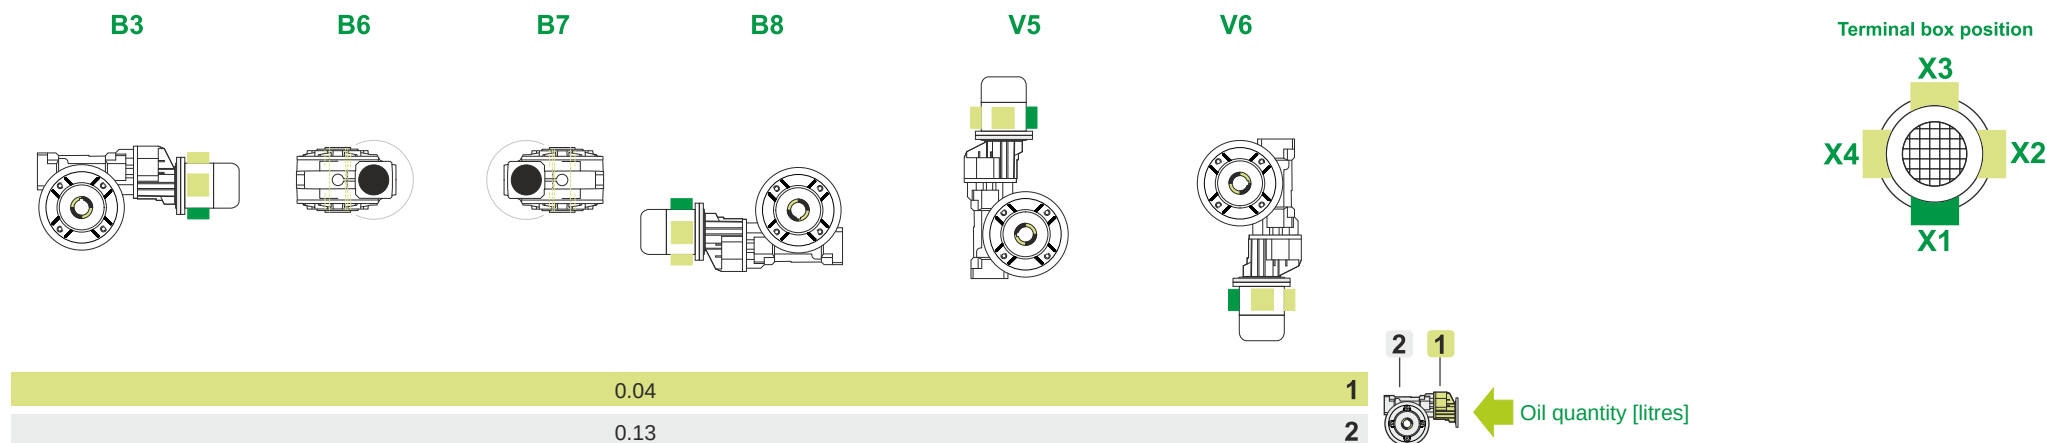

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

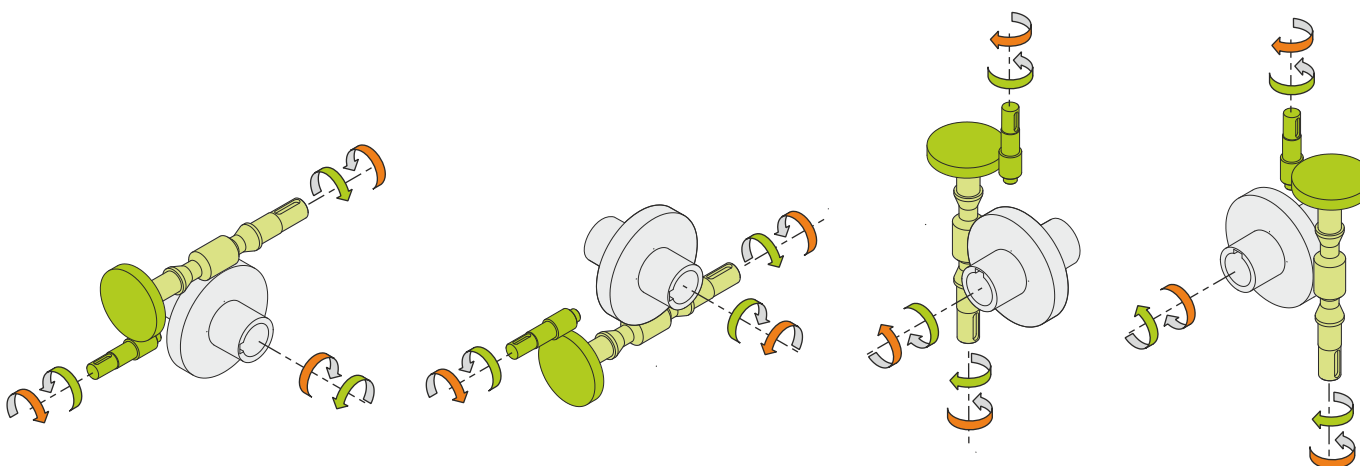

Weight

Gear unit [kg]	5.3
Electric motor [kg]	2.6

Gearing data

Axial module	1.4
Number of starts	1
Lead angle	3° 42'
Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving