

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	200
Ratio (i=)		7
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	9.2
Service factor		2.1
Rated Power P1	[kW]	18.99

Output data

Gear unit	M RS 130 PC 7 132 B14 AC 48 MT 9.2 kW 132 ML4 B14 X3 B3
------------------	--

Type		RS - Worm speed reducers
Input type		M
Size		130
Ratio (i=)		7
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	200
Rated output torque	[Nm]	390.98
Service Factor		2.1
Efficiency		0.89
Inertia moment	[kgm ²]	0.003944

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads

Ball bearings output radial load	[N]	5000
Taper bearings output radial load	[N]	7000
Ball bearings output axial load	[N]	1000
Taper bearings output axial load	[N]	1400

Accessories


Hollow output shaft	AC 48
---------------------	-------

Electric motor

Size		132 ML4
Poles		4
Power	[kW]	9.2


Electric motor configuration

Motor flange	B14
Terminal box position	X3

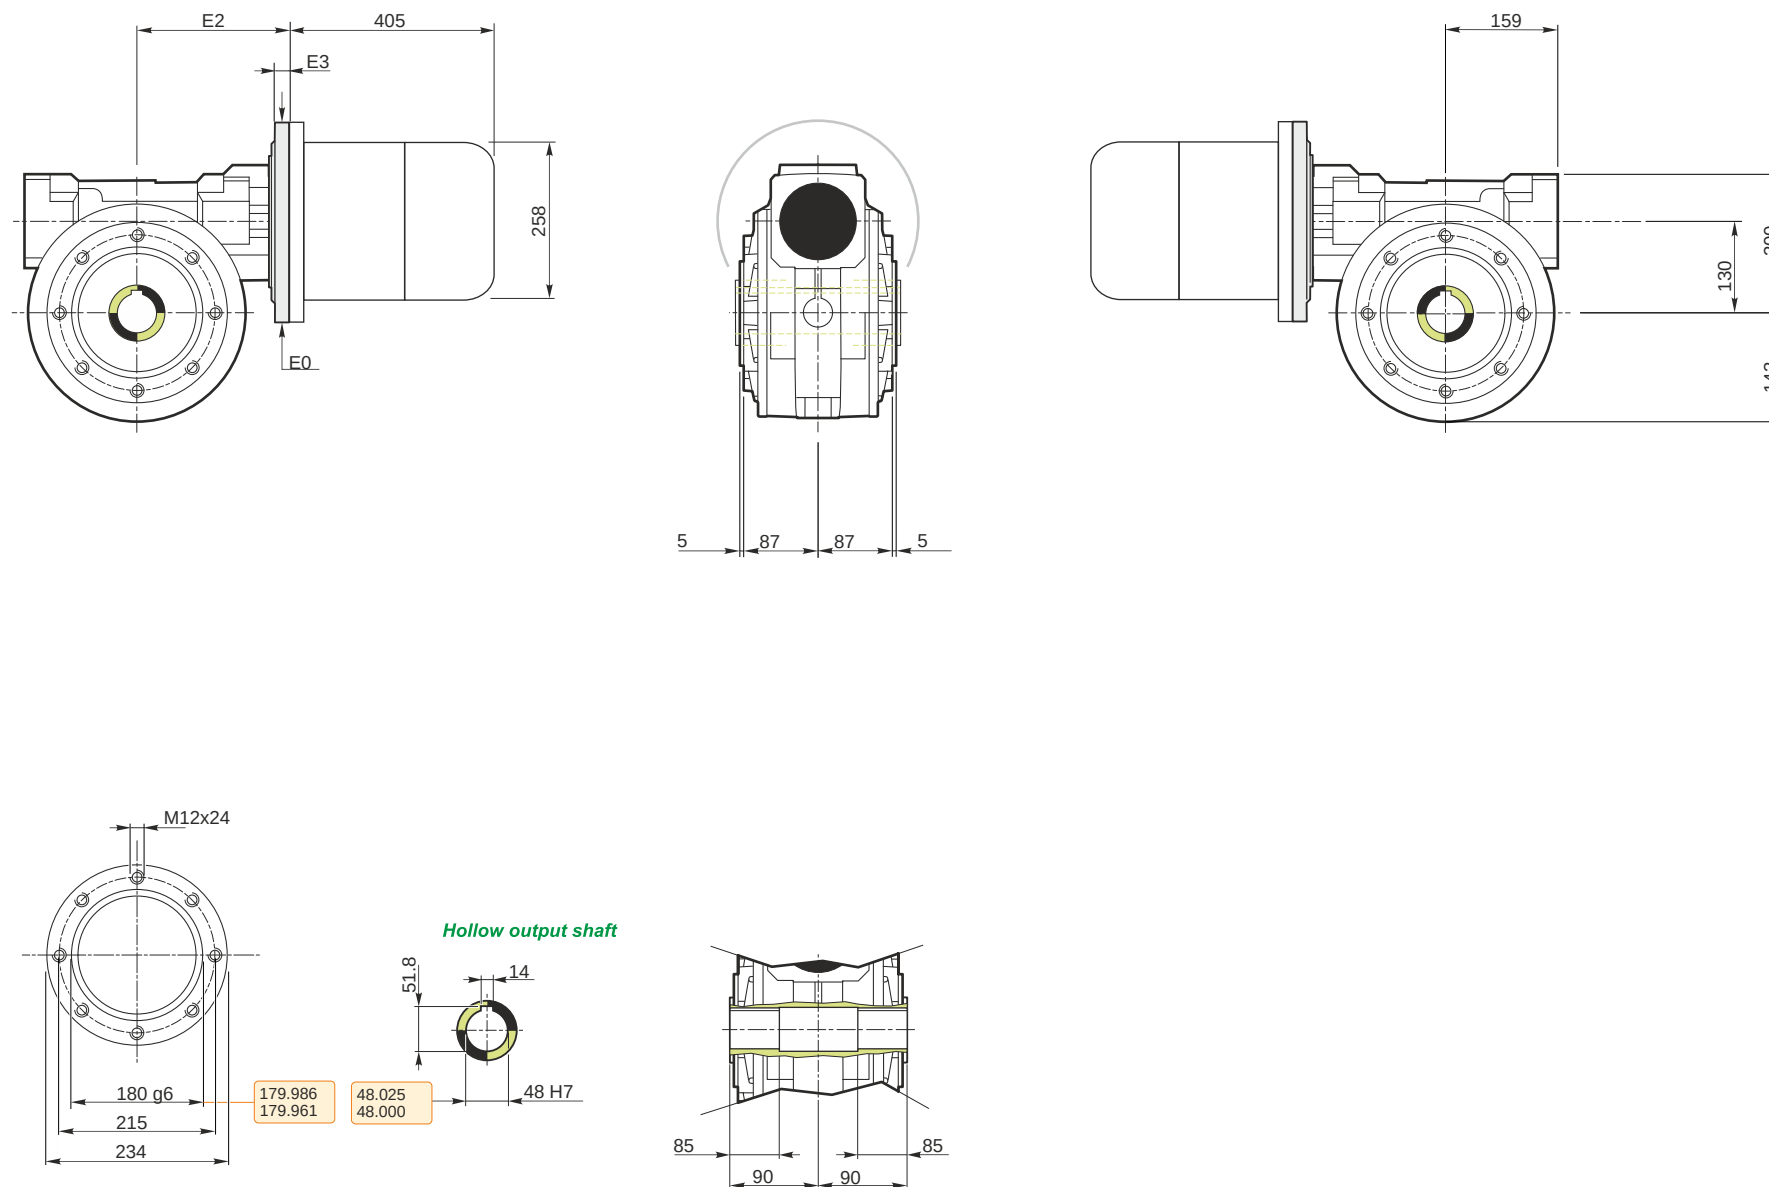


M RS 130 PC 7 132 B14 AC 48 MT 9.2 kW 132 ML4 B14 X3 B3

Mounting positions

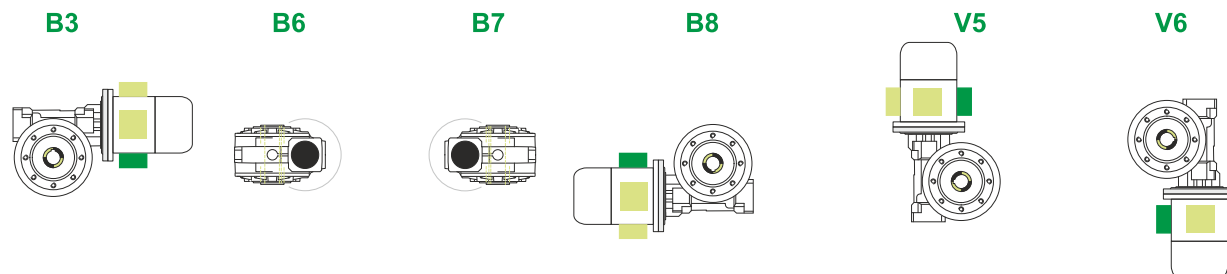

Terminal box position




2.75



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

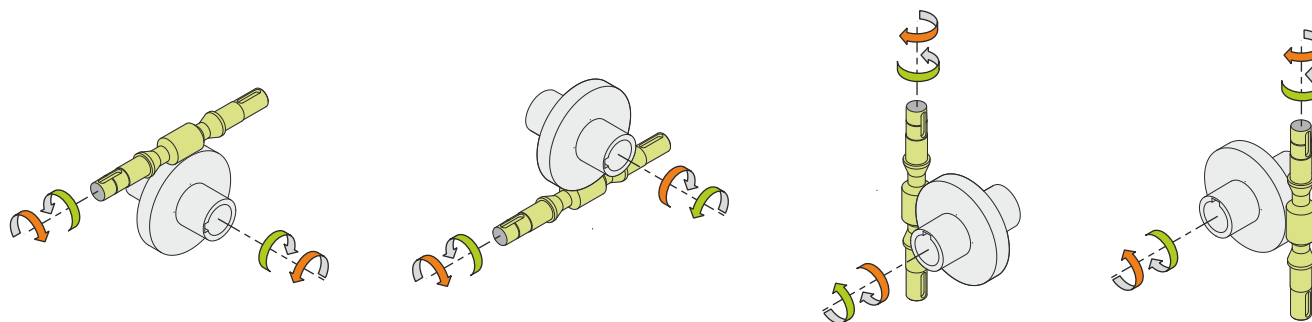

Weight

Gear unit [kg]	50
Electric motor [kg]	52

Gearing data

Axial module	7.25
Number of starts	4
Lead angle	26° 57'
Pressure angle	20°

Backdriving

Static back-driving
Quick back-driving
Dynamic back-driving