

Input data

System of measurement		Metric
Input type		Coupling for electric motor
Input speed	[rpm]	1400
Output speed	[rpm]	361.29
Ratio (i=)		3.88
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	3
Service factor		3


Output data

Gear unit	S XA 100 3.9 100 B5
------------------	----------------------------

Type		XA - One stage helical gearboxes
Input type		S (Elastic coupling)
Size		100
Ratio (i=)		3.88
Input flange		B5
Input speed	[rpm]	1400
Output speed	[rpm]	361.29
Rated output torque	[Nm]	77.71
Service Factor		3
Efficiency		0.98


Electric motor coupling

Size		100 B4
Poles n.		4
Power	[kW]	3

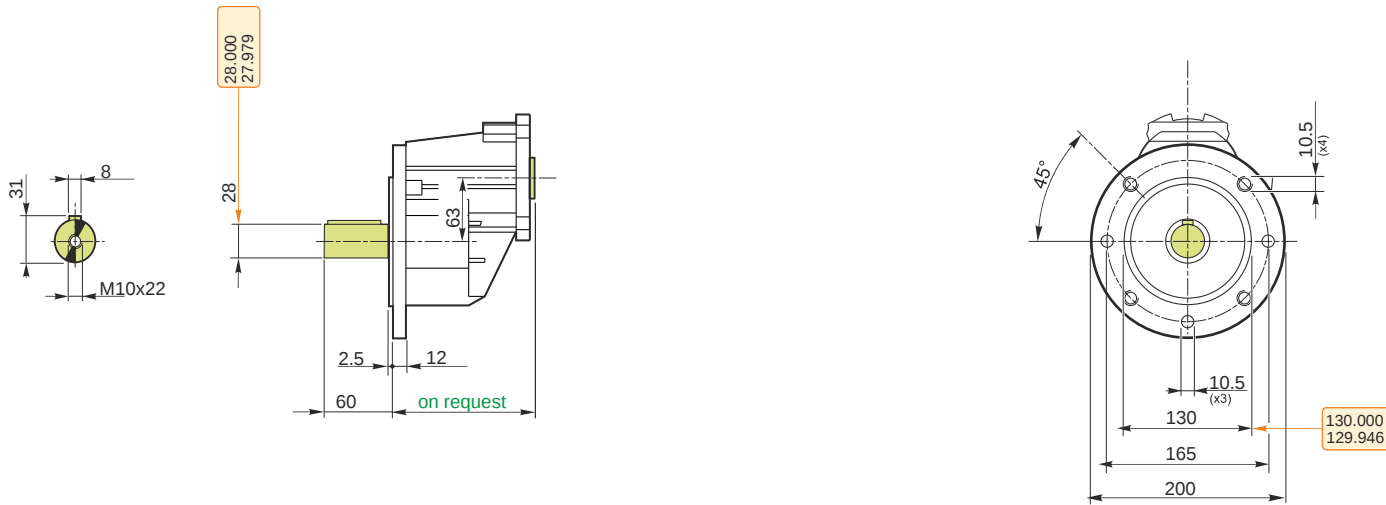

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

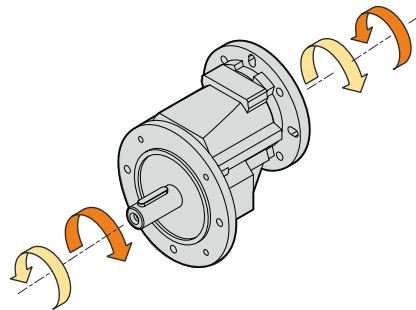

Weight

Gear unit [kg]

7