

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	0.89
Ratio (i=)		1568
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.55
Service factor		1
Rated Power P1	[kW]	0.54

Output data

Gear unit	M RS/RS 60/130 S (integral) 11 1568 80 B14 AC 48 MT 0.55 kW 80 A4 B14 X3 B3
------------------	--

Type		RS/RS - Worm speed reducers
Input type		M
Size		60/130
Ratio (i=)		1568
Gearbox ratio		28.00
Pre-stage ratio		56.00
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	0.89
Rated output torque	[Nm]	2058.98
Service Factor		1
Efficiency		0.35

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Feet
Version		S (integral)
Attachment position		11

Output radial and axial loads

Ball bearings output radial load	[N]	11500
Taper bearings output radial load	[N]	14500
Ball bearings output axial load	[N]	2300
Taper bearings output axial load	[N]	2900

Accessories




Hollow output shaft		AC 48
---------------------	--	-------

Electric motor




Size		80 A4
Poles		4
Power	[kW]	0.55

Electric motor configuration

Motor flange		B14
Terminal box position		X3

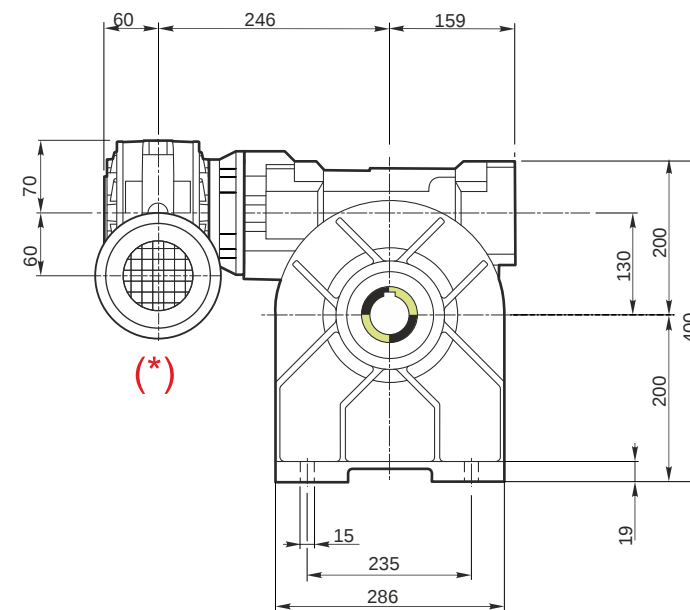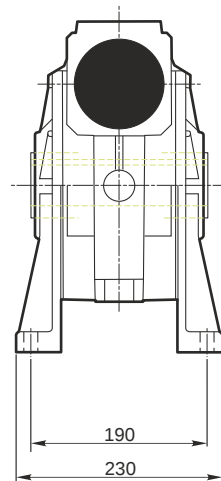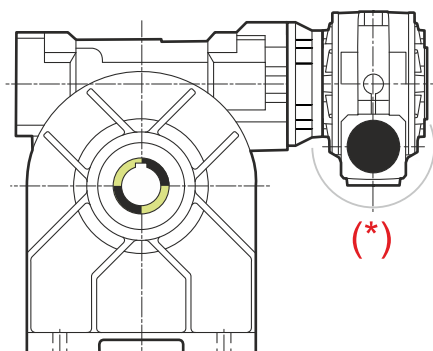


Hollow output shaft

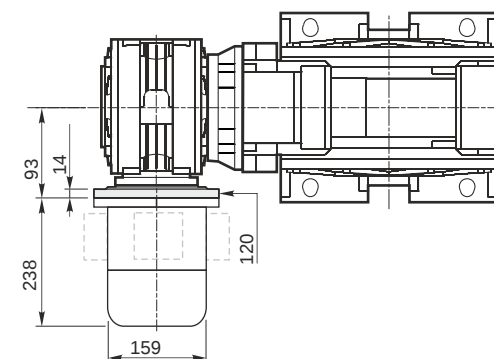


Mounting positions


B3




B6




B7




B8




V5



V6



Terminal box position




0.23

1

2.75

2




Oil quantity [litres]


Lubricant type: Long life synthetic oil ISO VG320

Attachment position


12



11




14



13




16




15




18



17




Direction of rotation

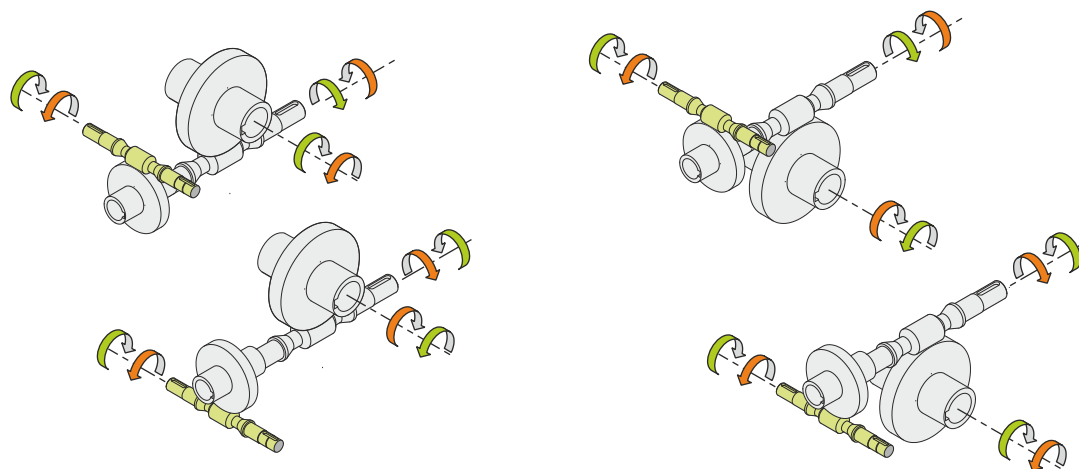

Weight

Gear unit [kg]	57
Electric motor [kg]	9.8

Gearing data 2



Axial module	7.25
Number of starts	1
Lead angle	20° 14'
Pressure angle	

Backdriving

- Static self-locking
- Slow back-driving in case of vibrations
- Low dynamic back-driving

M RS/RS 60/130 S (integral) 11 1568 80 B14 AC 48 MT 0.55 kW 80 A4 B14 X3 B3