

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	0.5
Ratio (i=)		2800
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.37
Service factor		1
Rated Power P1	[kW]	0.37

Output data

Gear unit	M RS/RS 70/150 S (integral) 11 2800 71 B5 AC 55 MT 0.37 kW 71 B4 B5 X3 B3
------------------	--

Type		RS/RS - Worm speed reducers
Input type		M
Size		70/150
Ratio (i=)		2800
Gearbox ratio		40.00
Pre-stage ratio		70.00
Input flange		B5
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	0.5
Rated output torque	[Nm]	2332.11
Service Factor		1
Efficiency		0.33

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Feet
Version		S (integral)
Attachment position		11

Output radial and axial loads

Ball bearings output radial load	[N]	15000
Taper bearings output radial load	[N]	19500
Ball bearings output axial load	[N]	3000
Taper bearings output axial load	[N]	3900

Accessories




Hollow output shaft		AC 55
---------------------	--	-------

Electric motor




Size		71 B4
Poles		4
Power	[kW]	0.37

Electric motor configuration

Motor flange		B5
Terminal box position		X3

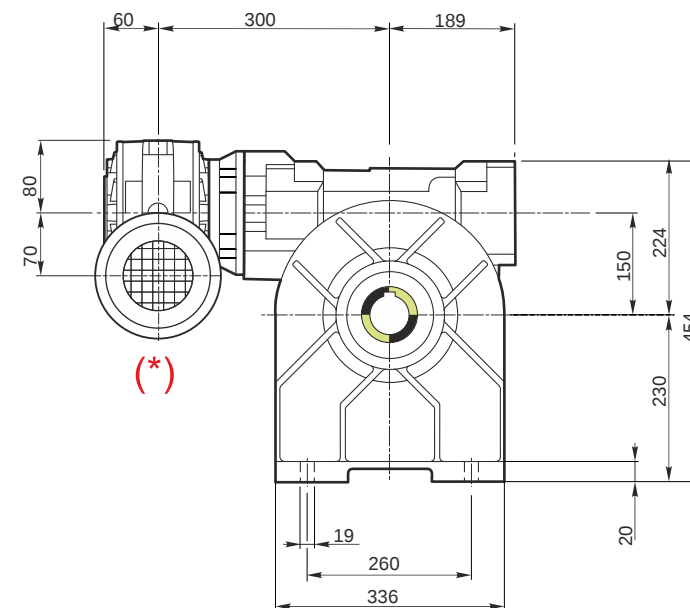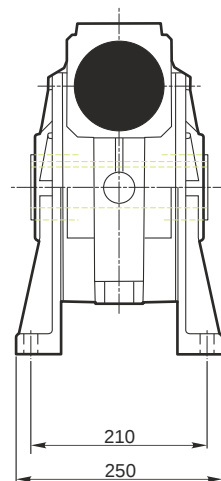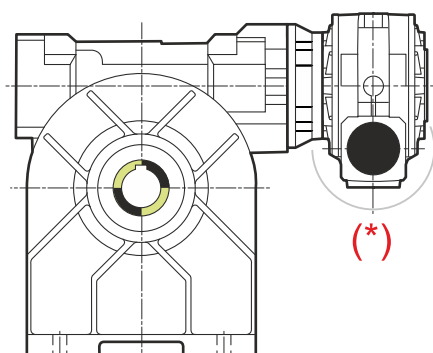


Hollow output shaft

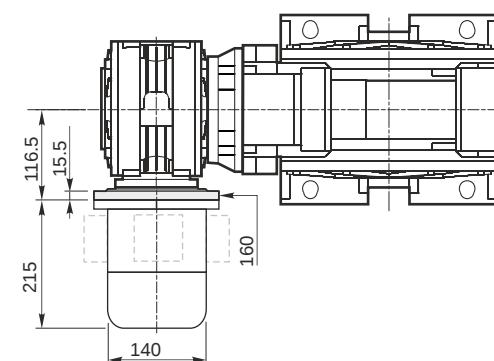


M RS/RS 70/150 S (integral) 11 2800 71 B5 AC 55 MT 0.37 kW 71 B4 B5 X3 B3


Mounting positions

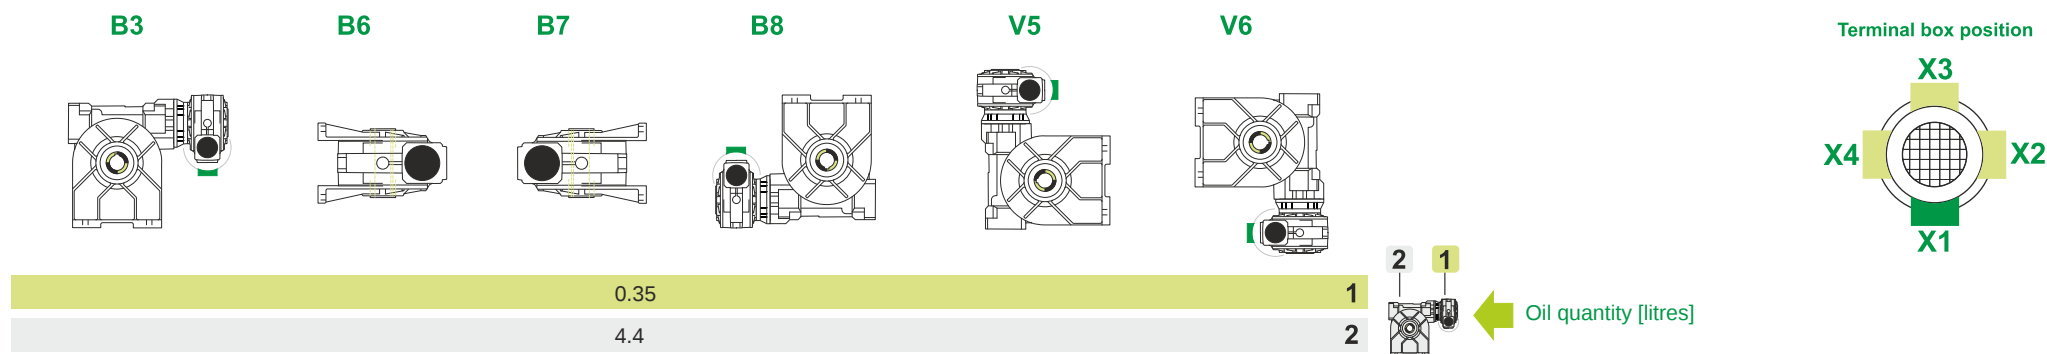

Attachment position

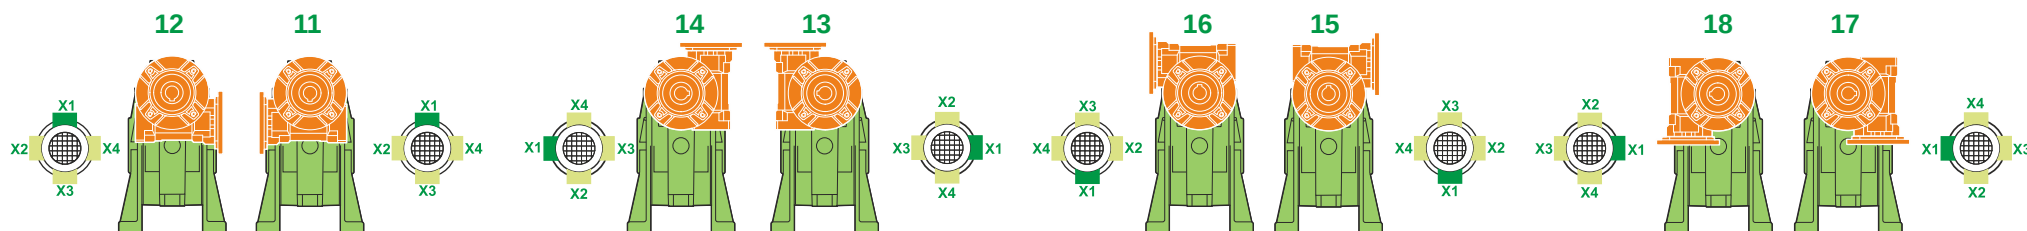

Direction of rotation

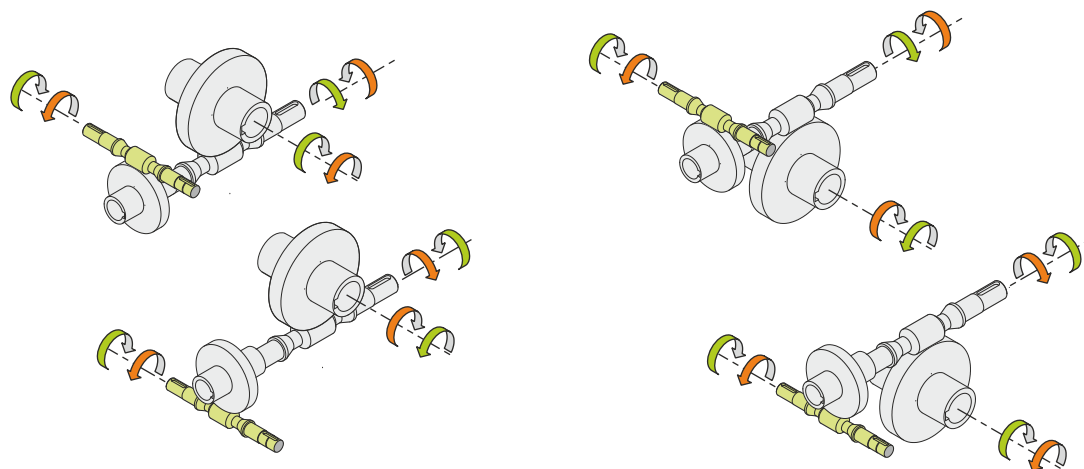

Weight

Gear unit [kg]	90
Electric motor [kg]	6.2

Gearing data 2

Axial module	6.25
Number of starts	1
Lead angle	20°07'
Pressure angle	

Backdriving

- Static self-locking
- No back-driving
- No dynamic back-driving

M RS/RS 70/150 S (integral) 11 2800 71 B5 AC 55 MT 0.37 kW 71 B4 B5 X3 B3