

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	11.33
Ratio (i=)		123.6
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.13
Service factor		1
Rated Power P1	[kW]	0.13

Output data

Gear unit **M RA 63/40 PC 10 123.6 63 B14 AC 19 MT 0.13 kW 63 A4 B14 X3 B3**

Type		RA - Worm speed reducers
Input type		M
Size		63/40
Ratio (i=)		123.6
Gearbox ratio		20.00
Pre-stage ratio		6.18
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	11.33
Rated output torque	[Nm]	73.44
Service Factor		1
Efficiency		0.67
Inertia moment	[kgm ²]	0.000022

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Shaft mounting
Version		PC
Attachment position		10

Output radial and axial loads

Ball bearings output radial load	[N]	2300
Taper bearings output radial load	[N]	2600
Ball bearings output axial load	[N]	460
Taper bearings output axial load	[N]	520

Accessories




Hollow output shaft		AC 19
---------------------	--	-------

Electric motor

Size		63 A4
Poles		4
Power	[kW]	0.13

Electric motor configuration

Motor flange		B14
Terminal box position		X3

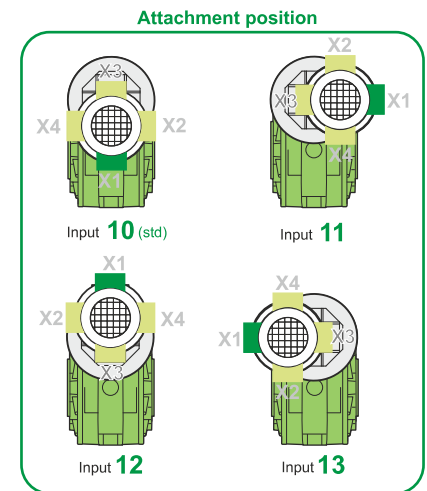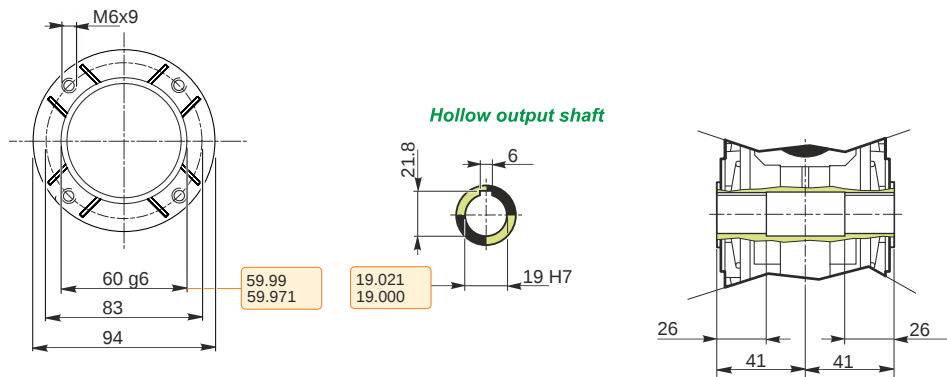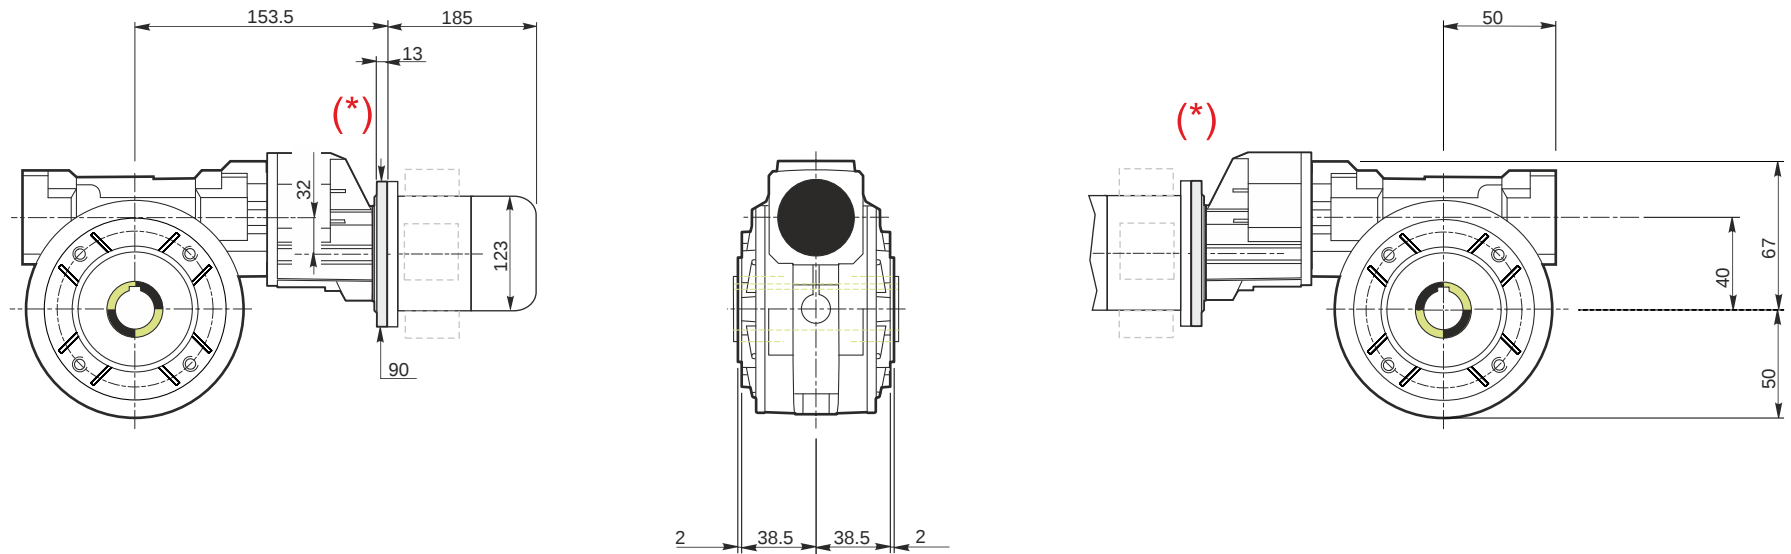

Mounting positions

B3






B6

B7


B8

V5


V6



Terminal box position







0.04	1
0.08	2



Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

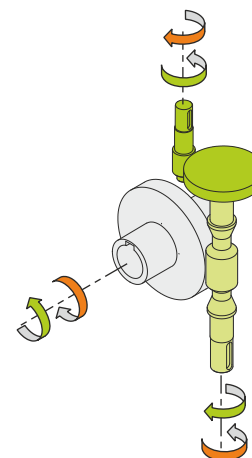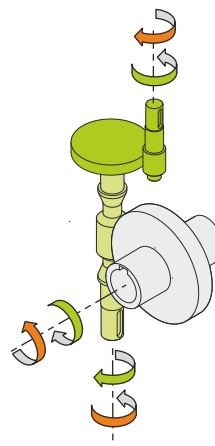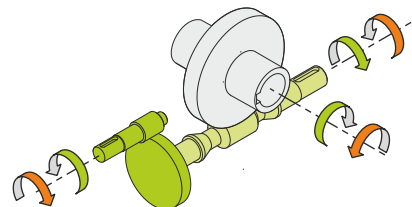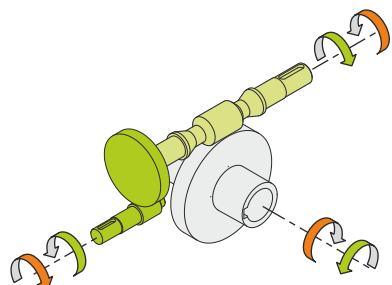

Weight

Gear unit [kg]	4
Electric motor [kg]	4.3

Gearing data

Axial module	1.5
Number of starts	2
Lead angle	8° 31'
Pressure angle	20°

Backdriving

Variable static self-locking
Quick back-driving in case of vibrations
Dynamic back-driving

M RA 63/40 PC 10 123.6 63 B14 AC 19 MT 0.13 kW 63 A4 B14 X3 B3