

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	32.1
Ratio (i=)		43.61
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	3
Service factor		2.8
Rated Power P1	[kW]	8.51

Output data

Gear unit **M RA 100/150 PC 10 43.61 100 B14 AC 55 MT 3 kW 100 B4 B14 X3 B3**

Type		RA - Worm speed reducers
Input type		M
Size		100/150
Ratio (i=)		43.61
Gearbox ratio		7.00
Pre-stage ratio		6.23
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	32.1
Rated output torque	[Nm]	740.73
Service Factor		2.8
Efficiency		0.83

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Shaft mounting
Version		PC
Attachment position		10

Output radial and axial loads

Ball bearings output radial load	[N]	11440
Taper bearings output radial load	[N]	17170
Ball bearings output axial load	[N]	2288
Taper bearings output axial load	[N]	3434

Accessories




Hollow output shaft		AC 55
---------------------	--	-------

Electric motor

Size		100 B4
Poles		4
Power	[kW]	3

Electric motor configuration


Motor flange		B14
Terminal box position		X3

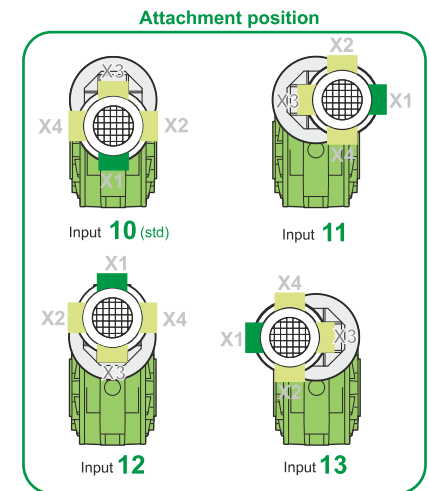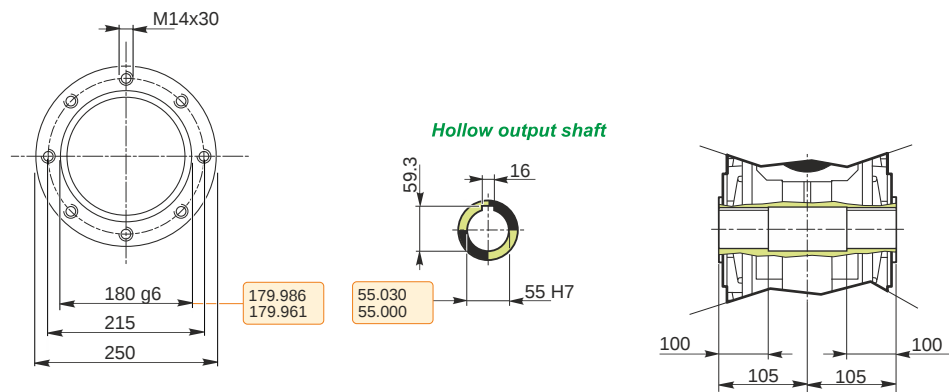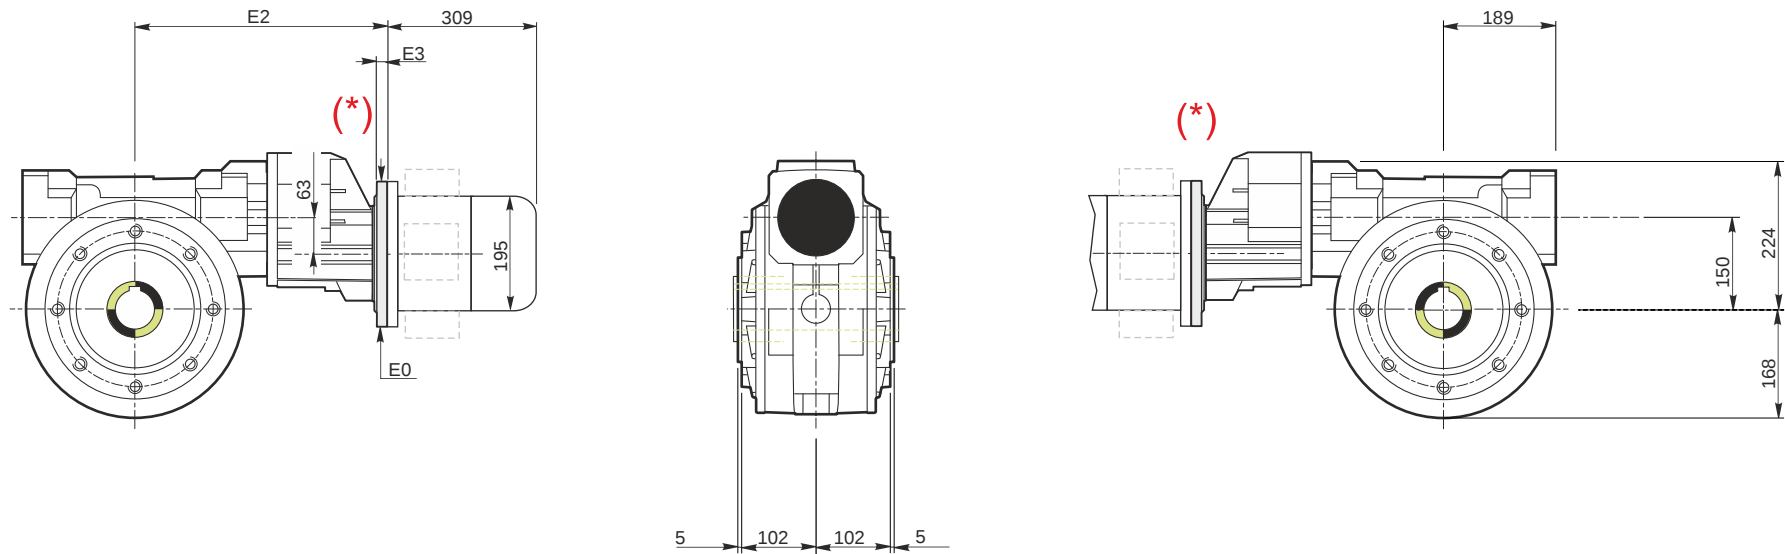


M RA 100/150 PC 10 43.61 100 B14 AC 55 MT 3 kW 100 B4 B14 X3 B3

Mounting positions


B3




B6




B7




B8




V5



V6



Terminal box position




0.2

1

4.4





2



Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

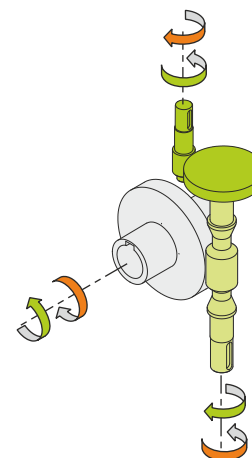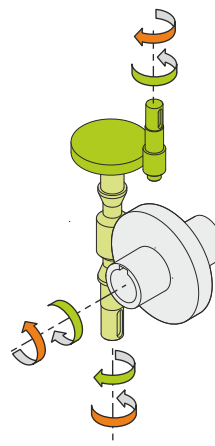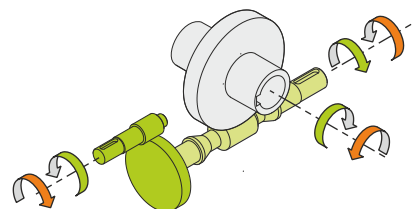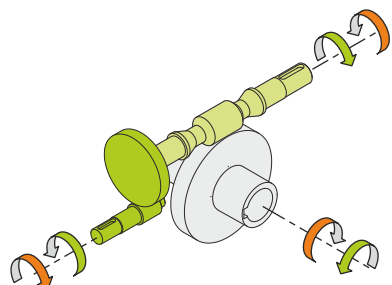

Weight

Gear unit [kg]	94
Electric motor [kg]	21

Gearing data

Axial module	8.25
Number of starts	4
Lead angle	25° 33'
Pressure angle	20°

Backdriving

Static back-driving
Quick back-driving
Dynamic back-driving