

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	22.47
Ratio (i=)		62.3
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	3
Service factor		2.2
Rated Power P1	[kW]	6.68

Output data

Gear unit	M RA 100/150 PC 10 62.3 100 B14 AC 55 MT 3 kW 100 B4 B14 X3 B3
------------------	---

Type		RA - Worm speed reducers
Input type		M
Size		100/150
Ratio (i=)		62.3
Gearbox ratio		10.00
Pre-stage ratio		6.23
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	22.47
Rated output torque	[Nm]	1032.69
Service Factor		2.2
Efficiency		0.81

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Shaft mounting
Version		PC
Attachment position		10

Output radial and axial loads

Ball bearings output radial load	[N]	12750
Taper bearings output radial load	[N]	19100
Ball bearings output axial load	[N]	2550
Taper bearings output axial load	[N]	3820

Accessories





Hollow output shaft		AC 55
---------------------	--	-------

Electric motor



Size		100 B4
Poles		4
Power	[kW]	3

Electric motor configuration


Motor flange		B14
Terminal box position		X3

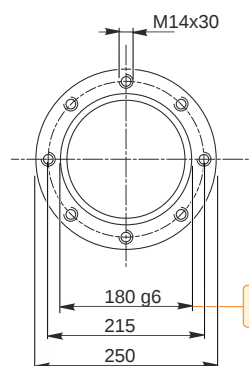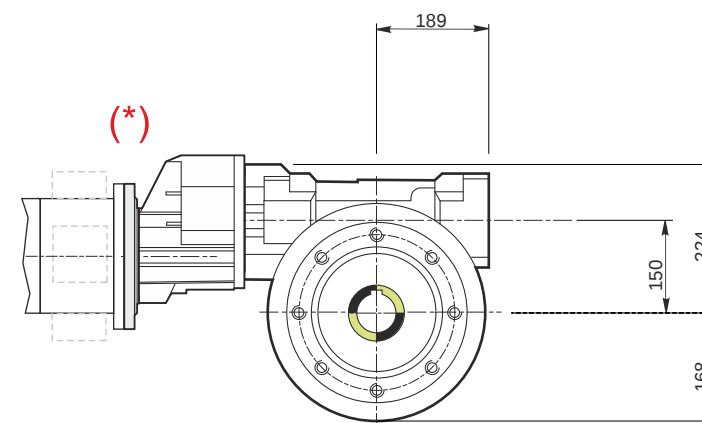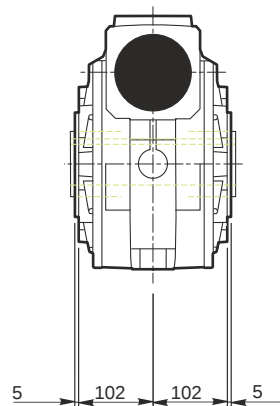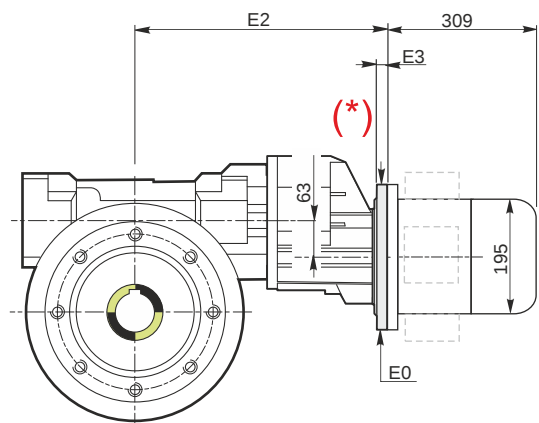


Hollow output shaft



Attachment position

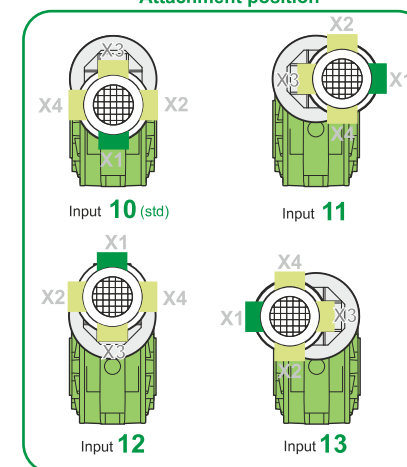


Mounting positions

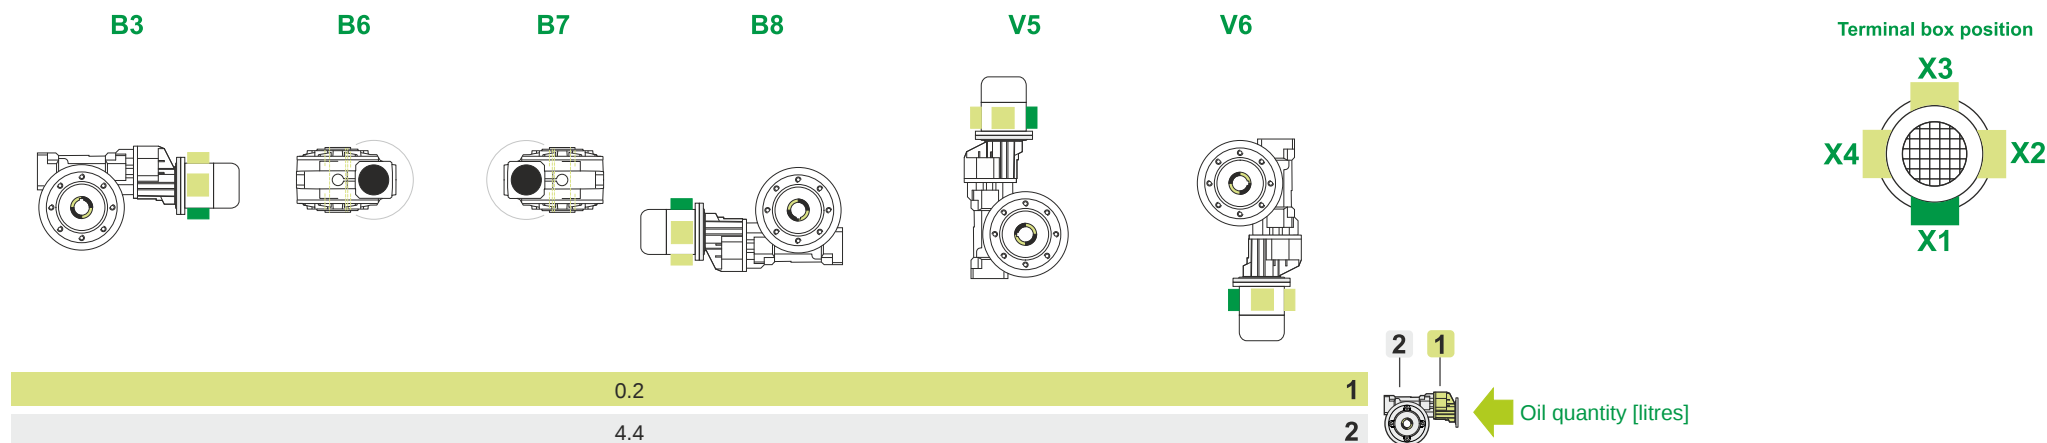

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

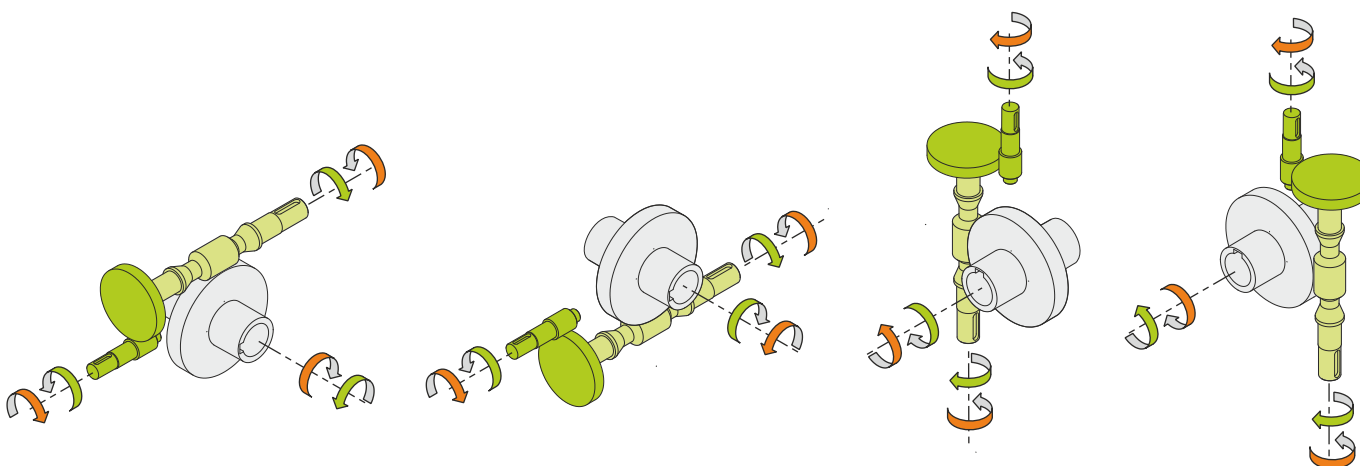

Weight

Gear unit [kg]	94
Electric motor [kg]	21

Gearing data

Axial module	8.00
Number of starts	3
Lead angle	21° 48'
Pressure angle	20°

Backdriving

Static back-driving
Quick back-driving
Dynamic back-driving