

Input data

| | | |
|-----------------------|-------|------------|
| System of measurement | | Metric |
| Input type | | Gear motor |
| Input speed | [rpm] | 1400 |
| Output speed | [rpm] | 265.15 |
| Ratio (i=) | | 5.28 |
| Frequency | [Hz] | 50 |
| Input options | | IEC |
| Requested input power | [kW] | 0.75 |
| Service factor | | 1.5 |
| Rated Power P1 | [kW] | 1.1 |

Output data

Gear unit **M RD 02 B3 H1 5.28 80 B14 AU 20x40 MT 0.75 kW 80 B4 B14 X3**

| | | |
|---------------------|---------------------|------------------------|
| Type | | RD - Helical gearboxes |
| Input type | | M |
| Size | | 02 |
| Ratio (i=) | | 5.28 |
| Input flange | | B14 |
| Mounting position | | H1 |
| Input speed | [rpm] | 1400 |
| Output speed | [rpm] | 265.15 |
| Rated output torque | [Nm] | 25.93 |
| Service Factor | | 1.5 |
| Efficiency | | 0.96 |
| Inertia moment | [kgm ²] | 0.000036 |

Gear unit configuration

| | | |
|--------------|--|----------|
| Fixing | | Feet |
| Output shaft | | AU 20x40 |

Output radial and axial loads


| | | |
|--------------------|-----|-----|
| Output radial load | [N] | 520 |
| Output axial load | [N] | 104 |

Electric motor

| | | |
|-------|------|-------|
| Size | | 80 B4 |
| Poles | | 4 |
| Power | [kW] | 0.75 |


Electric motor configuration

| | | |
|-----------------------|--|-----|
| Motor flange | | B14 |
| Terminal box position | | X3 |

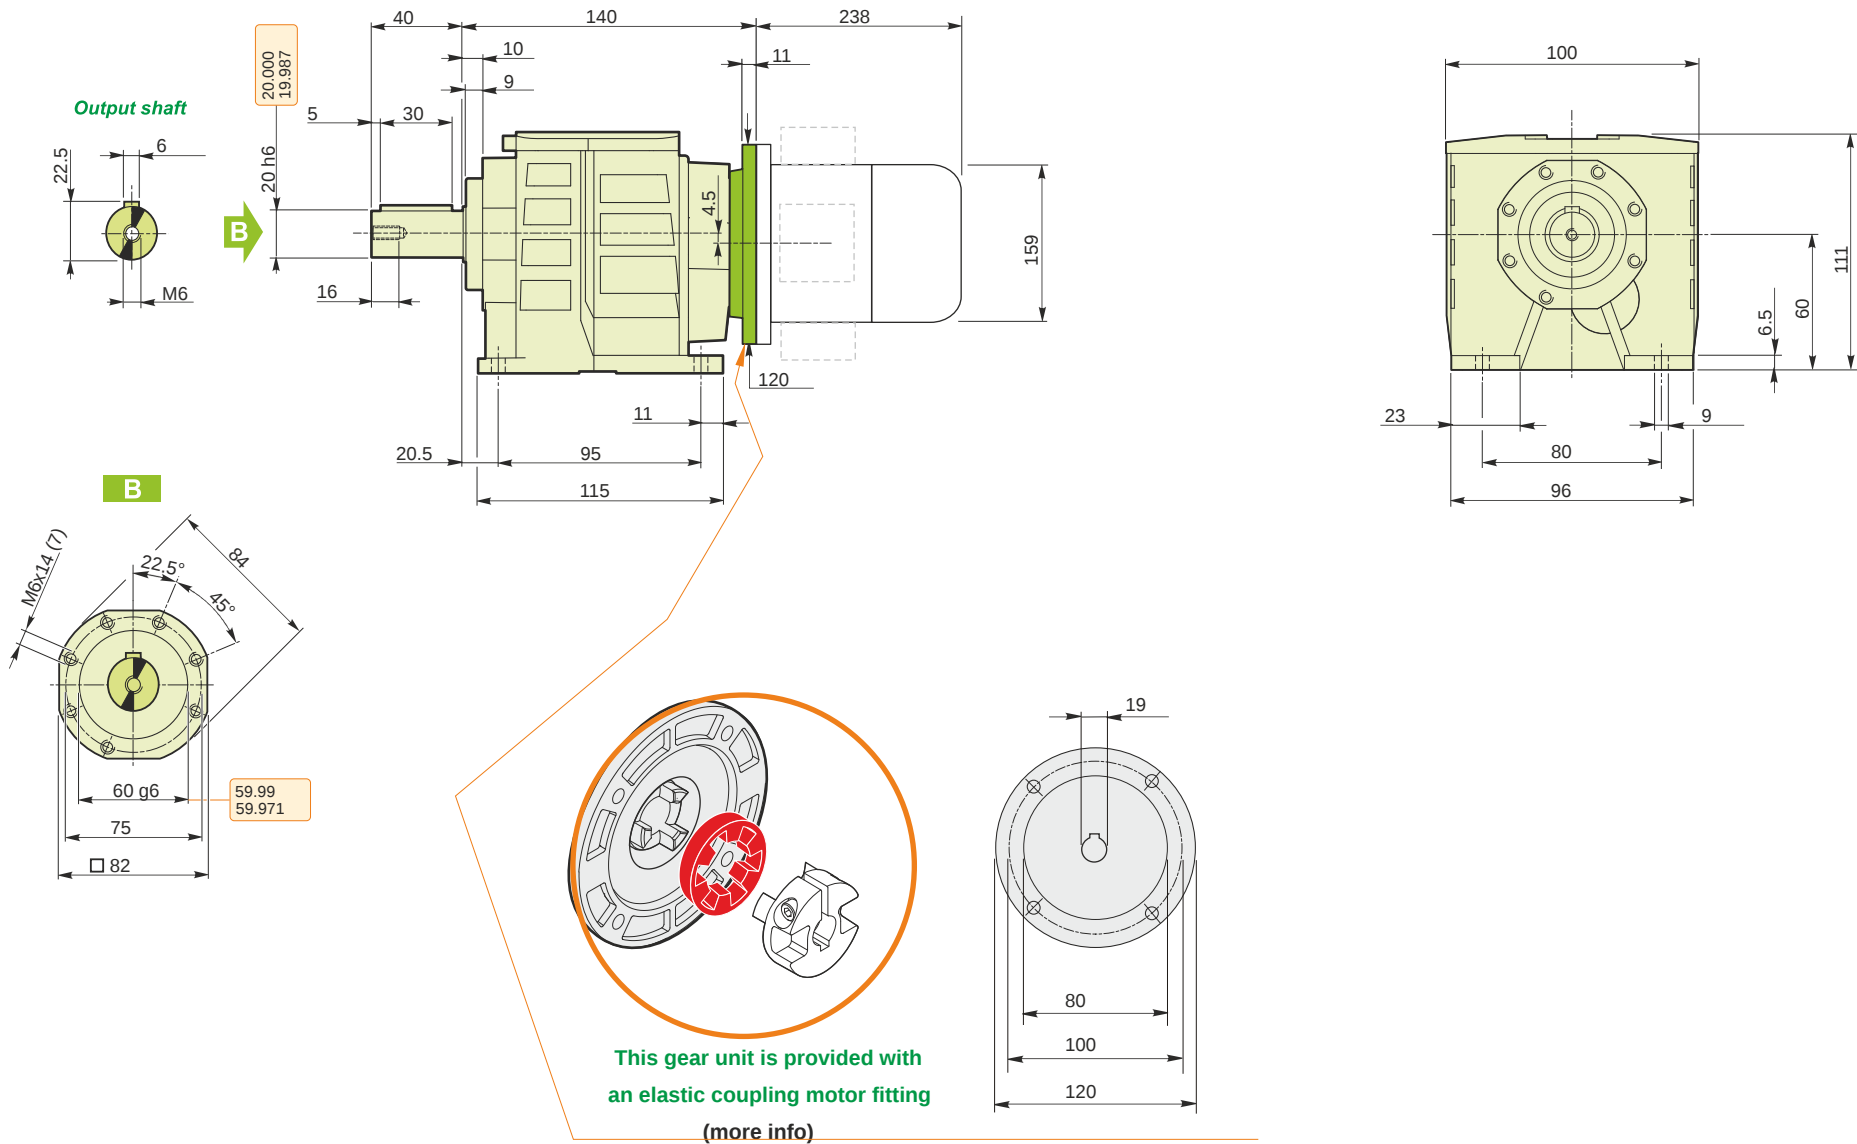

M RD 02 B3 H1 5.28 80 B14 AU 20x40 MT 0.75 kW 80 B4 B14 X3

Mounting positions

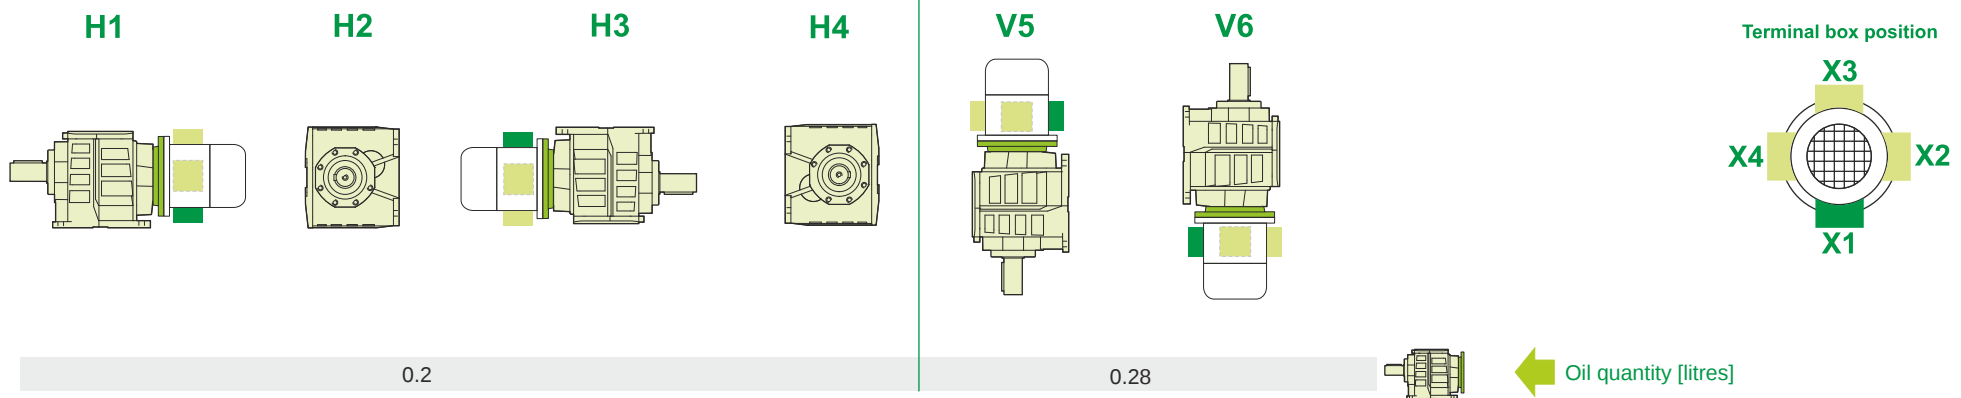

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

| | |
|---------------------|-----|
| Gear unit [kg] | 3 |
| Electric motor [kg] | 9.8 |

M RD 02 B3 H1 5.28 80 B14 AU 20x40 MT 0.75 kW 80 B4 B14 X3