

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	21.79
Ratio (i=)		64.26
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.55
Service factor		0.9
Rated Power P1	[kW]	0.48

Output data

Gear unit	M RD 23 B3 H1 64.26 80 B14 AU 30x60 MT 0.55 kW 80 A4 B14 X3
------------------	--

Type		RD - Helical gearboxes
Input type		M
Size		23
Ratio (i=)		64.26
Input flange		B14
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	21.79
Rated output torque	[Nm]	226.62
Service Factor		0.9
Efficiency		0.94
Inertia moment	[kgm ²]	0.000255

Gear unit configuration

Fixing		Feet
Output shaft		AU 30x60

Output radial and axial loads


Output radial load	[N]	2500
Output axial load	[N]	500

Electric motor

Size		80 A4
Poles		4
Power	[kW]	0.55


Electric motor configuration

Motor flange		B14
Terminal box position		X3

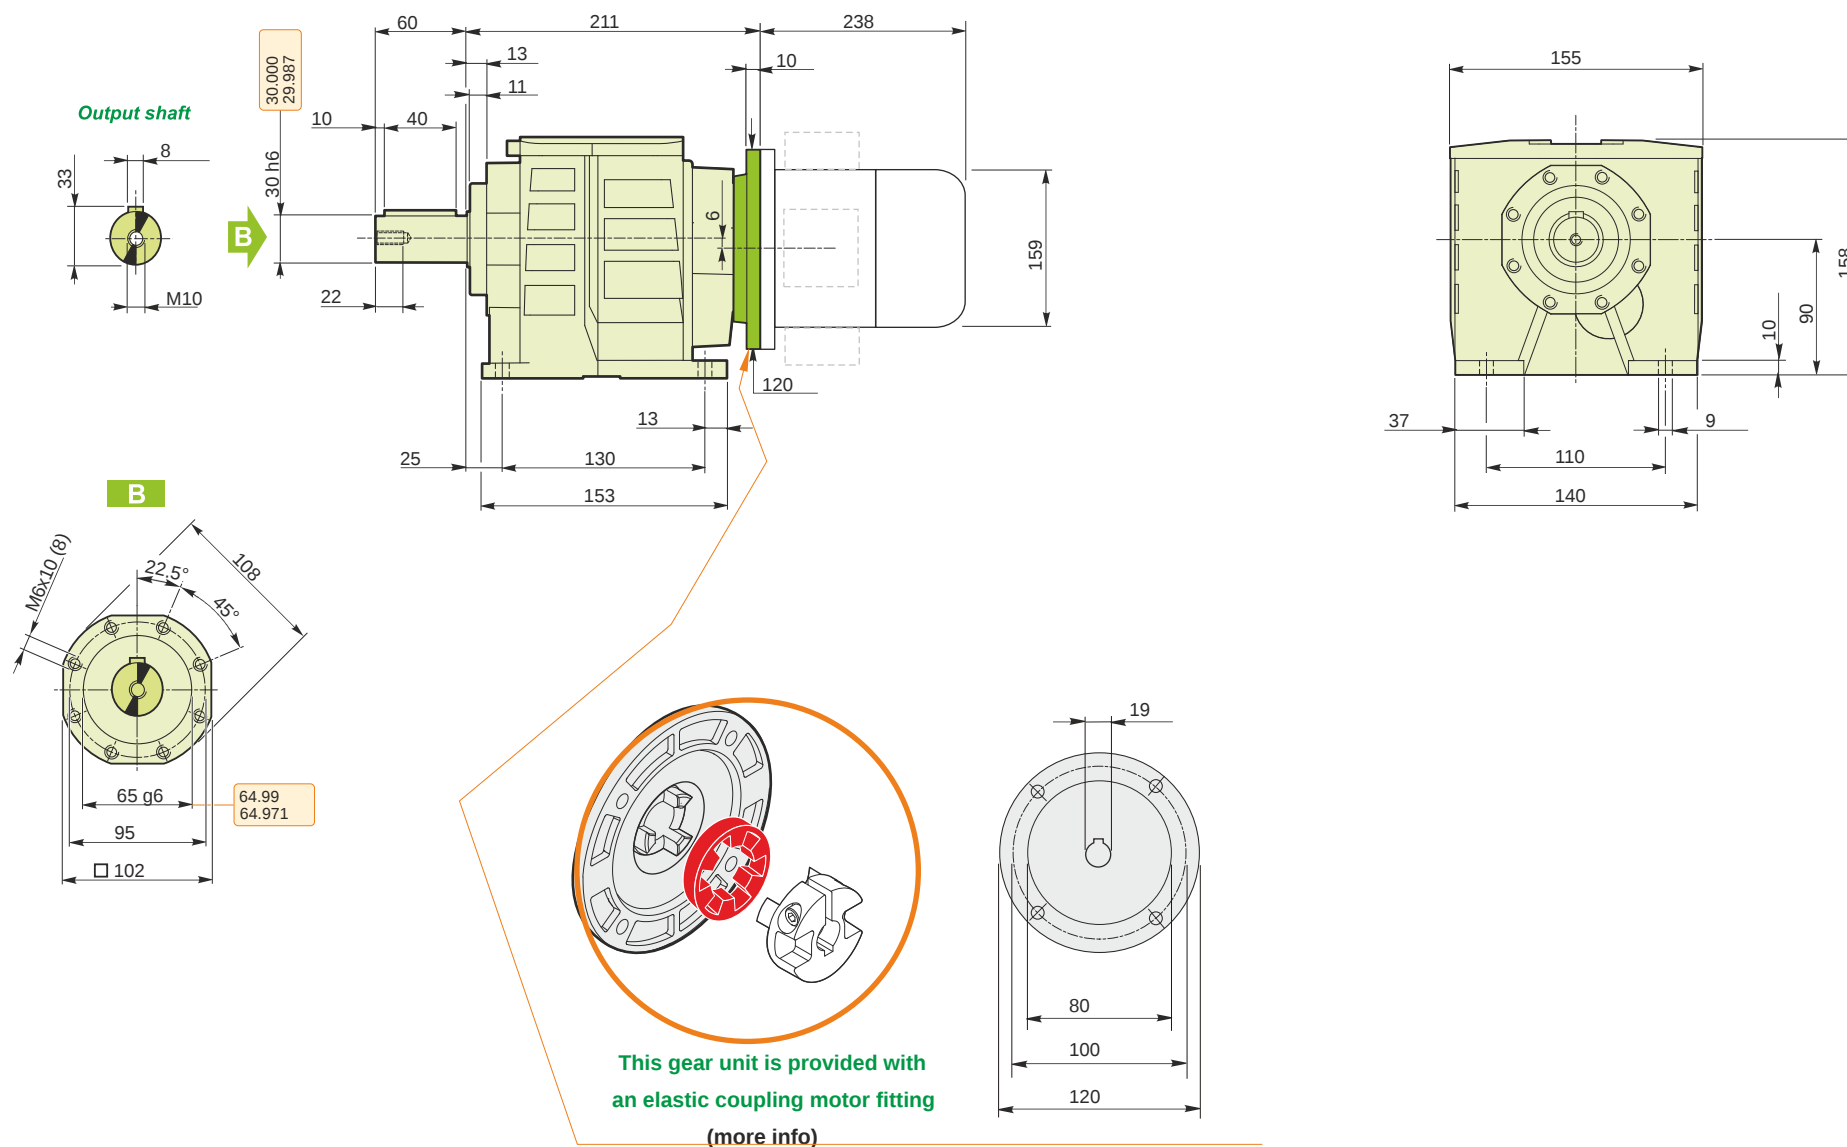

M RD 23 B3 H1 64.26 80 B14 AU 30x60 MT 0.55 kW 80 A4 B14 X3

Mounting positions

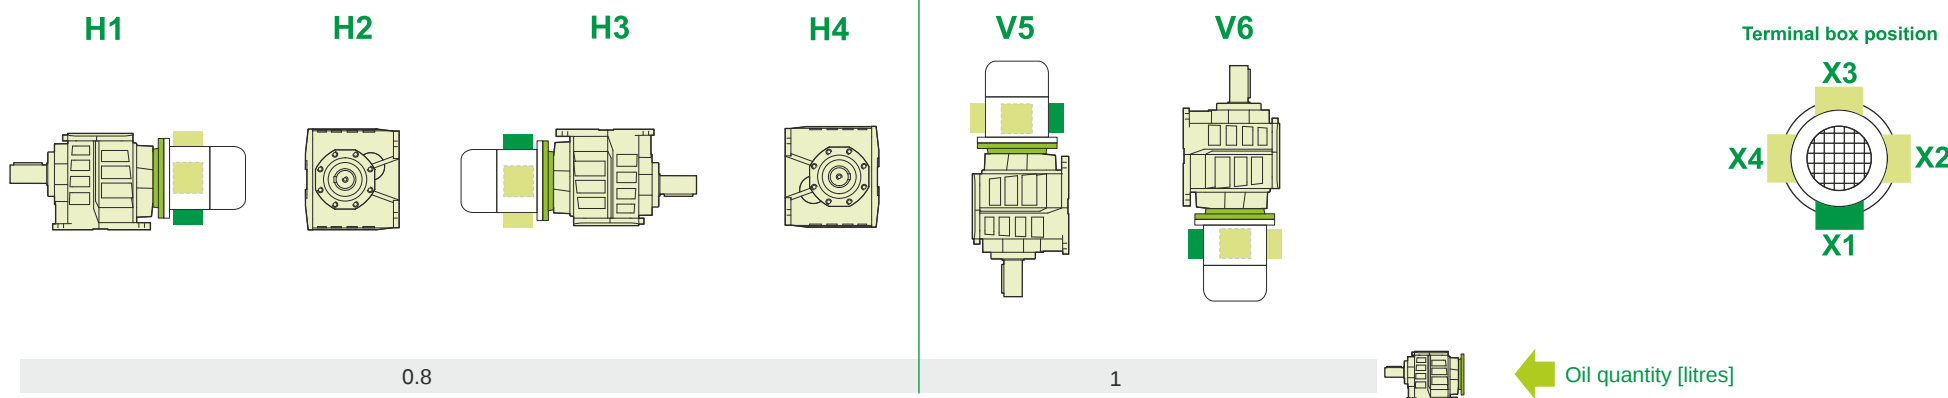

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	8.5
Electric motor [kg]	9.8

M RD 23 B3 H1 64.26 80 B14 AU 30x60 MT 0.55 kW 80 A4 B14 X3