

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	6.69
Ratio (i=)		209.25
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.18
Service factor		0.8
Rated Power P1	[kW]	0.15

Output data

Gear unit	M RD 23 B3 H1 209.25 63 B5 AU 30x60 MT 0.18 kW 63 B4 B5 X3	
------------------	---	--

Type		RD - Helical gearboxes
Input type		M
Size		23
Ratio (i=)		209.25
Input flange		B5
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	6.69
Rated output torque	[Nm]	241.51
Service Factor		0.8
Efficiency		0.94
Inertia moment	[kgm ²]	0.000309

Gear unit configuration

Fixing		Feet
Output shaft		AU 30x60

Output radial and axial loads


Output radial load	[N]	3000
Output axial load	[N]	600

Electric motor

Size		63 B4
Poles		4
Power	[kW]	0.18


Electric motor configuration

Motor flange		B5
Terminal box position		X3

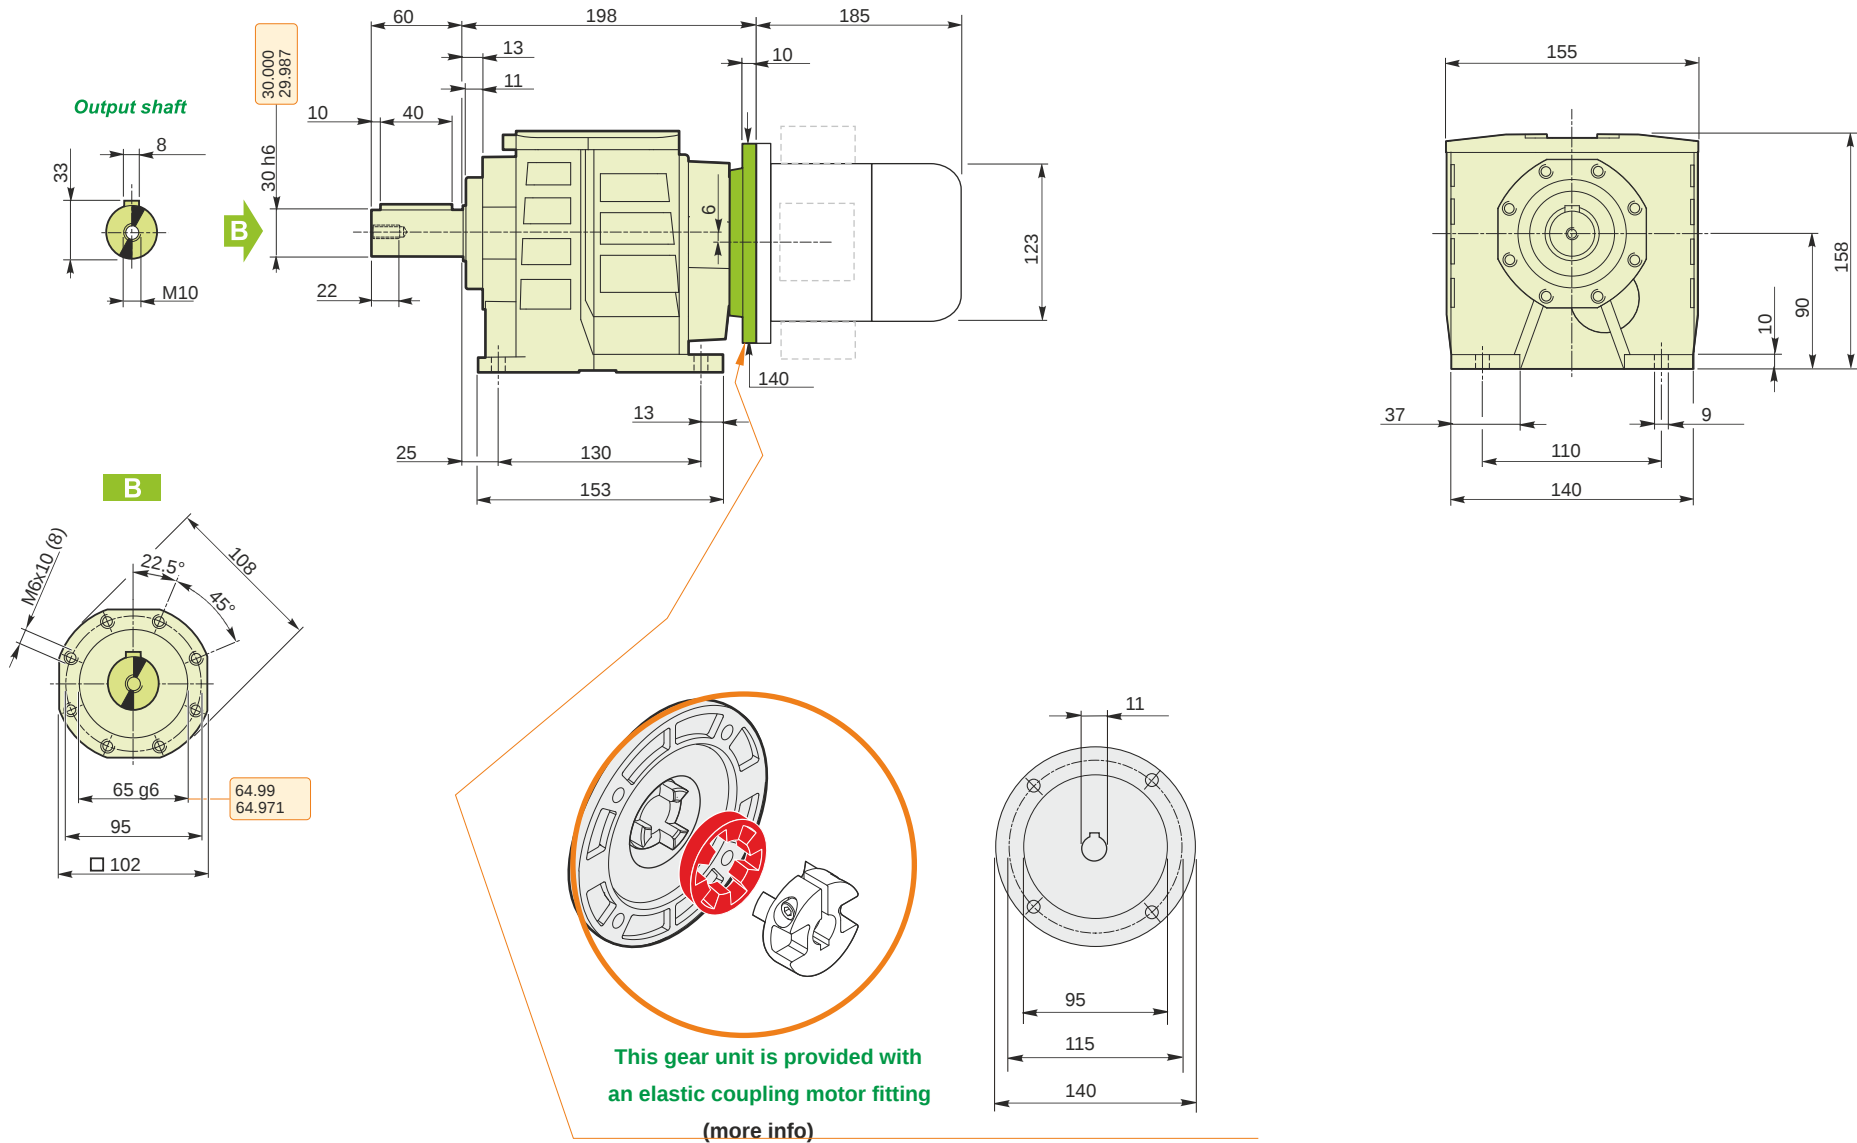

M RD 23 B3 H1 209.25 63 B5 AU 30x60 MT 0.18 kW 63 B4 B5 X3

Mounting positions

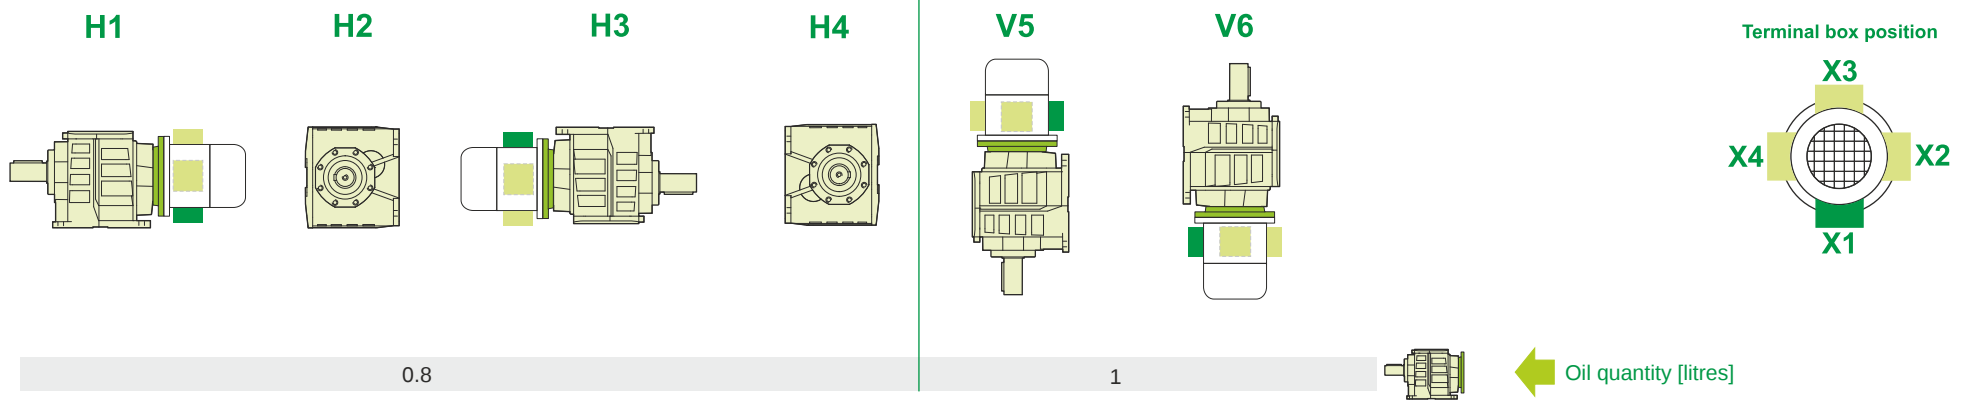

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	8.5
Electric motor [kg]	4.3

M RD 23 B3 H1 209.25 63 B5 AU 30x60 MT 0.18 kW 63 B4 B5 X3