

### Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	33.7
Ratio (i=)		41.54
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	1.5
Service factor		1.1
Rated Power P1	[kW]	1.65

### Output data

**Gear unit** **M RD 42 B3 H1 41.54 90 B14 AU 35x70 MT 1.5 kW 90 L4 B14 X3**

Type		RD - Helical gearboxes
Input type		M
Size		42
Ratio (i=)		41.54
Input flange		B14
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	33.7
Rated output torque	[Nm]	408.04
Service Factor		1.1
Efficiency		0.96
Inertia moment	[kgm <sup>2</sup> ]	0.000776

#### Gear unit configuration

Fixing		Feet
Output shaft		AU 35x70

#### Output radial and axial loads


Output radial load	[N]	7000
Output axial load	[N]	1400

#### Electric motor

Size		90 L4
Poles		4
Power	[kW]	1.5


#### Electric motor configuration

Motor flange		B14
Terminal box position		X3

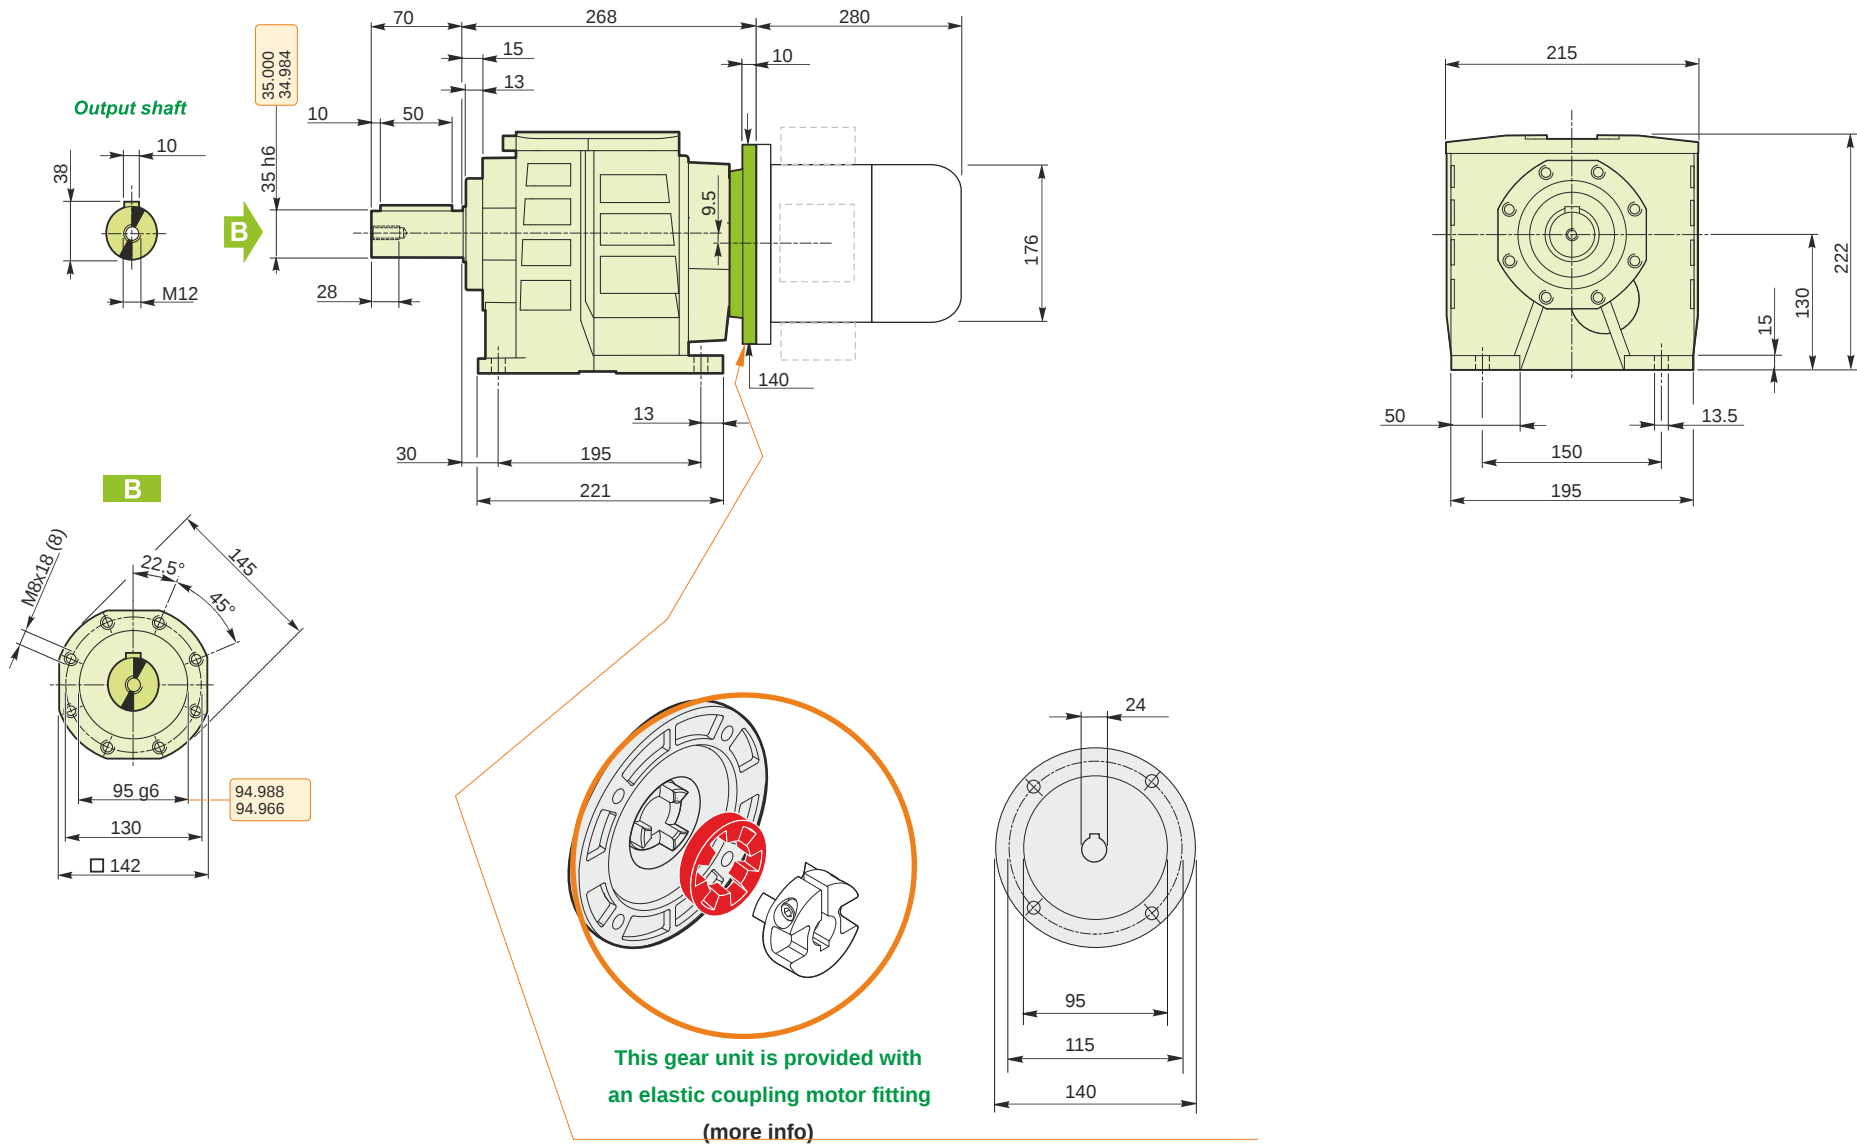

**M RD 42 B3 H1 41.54 90 B14 AU 35x70 MT 1.5 kW 90 L4 B14 X3**

**Mounting positions**

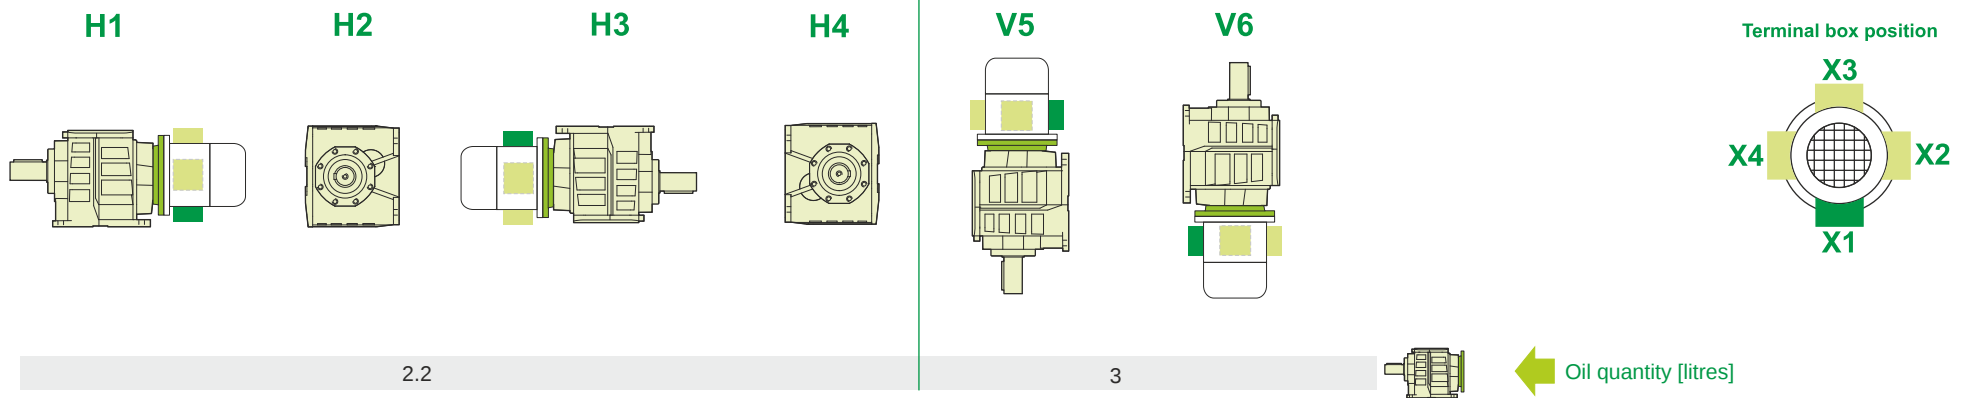

Lubricant type: Long life synthetic oil ISO VG320

**Direction of rotation**



**Weight**

Gear unit [kg]	20
Electric motor [kg]	13.5

**M RD 42 B3 H1 41.54 90 B14 AU 35x70 MT 1.5 kW 90 L4 B14 X3**