

### Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	11.28
Ratio (i=)		124.13
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.75
Service factor		1.2
Rated Power P1	[kW]	0.88

### Output data

<b>Gear unit</b>	<b>M RD 43 B3 H1 124.13 80 B14 AU 40x80 MT 0.75 kW 80 B4 B14 X3</b>	
------------------	---	--

Type		RD - Helical gearboxes
Input type		M
Size		43
Ratio (i=)		124.13
Input flange		B14
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	11.28
Rated output torque	[Nm]	596.95
Service Factor		1.2
Efficiency		0.94
Inertia moment	[kgm <sup>2</sup> ]	0.00097

#### Gear unit configuration

Fixing		Feet
Output shaft		AU 40x80

#### Output radial and axial loads


Output radial load	[N]	5400
Output axial load	[N]	1080

#### Electric motor

Size		80 B4
Poles		4
Power	[kW]	0.75


#### Electric motor configuration

Motor flange		B14
Terminal box position		X3

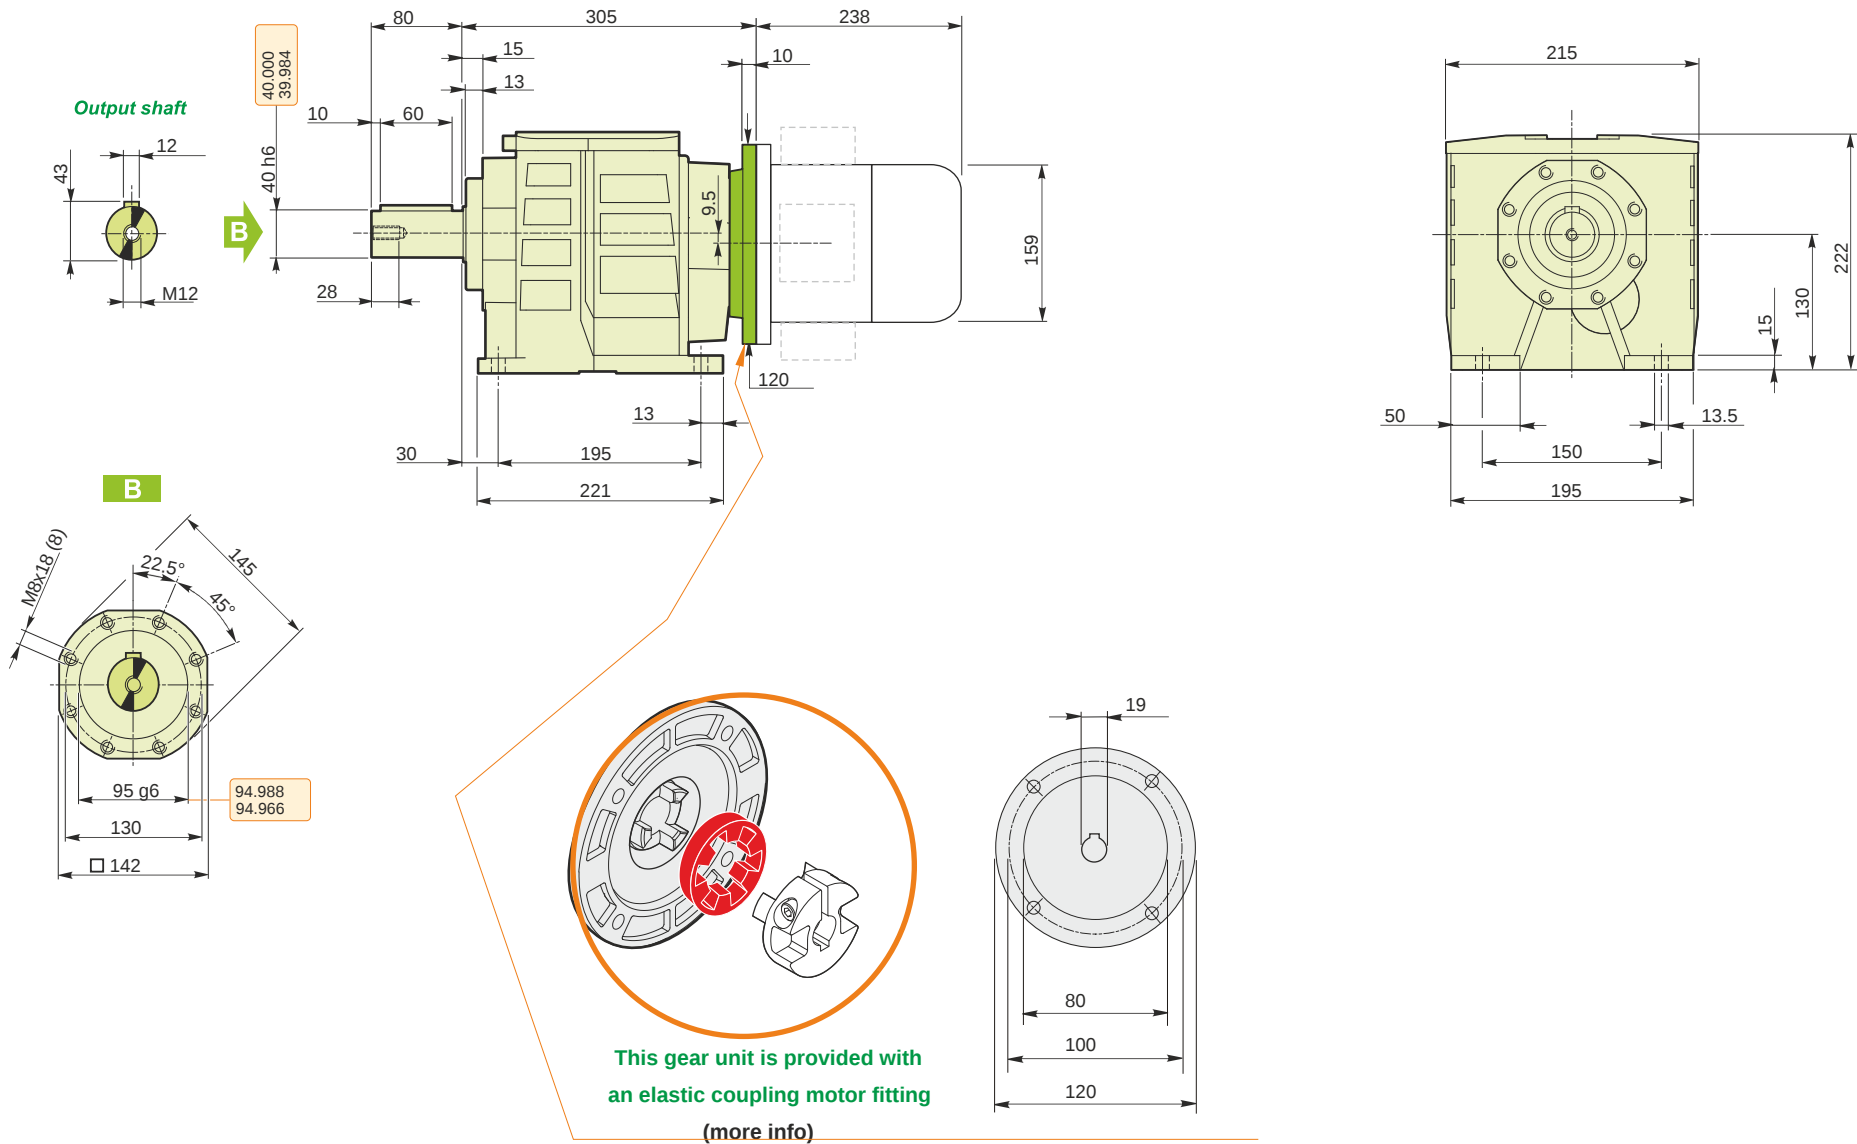

**M RD 43 B3 H1 124.13 80 B14 AU 40x80 MT 0.75 kW 80 B4 B14 X3**

**Mounting positions**

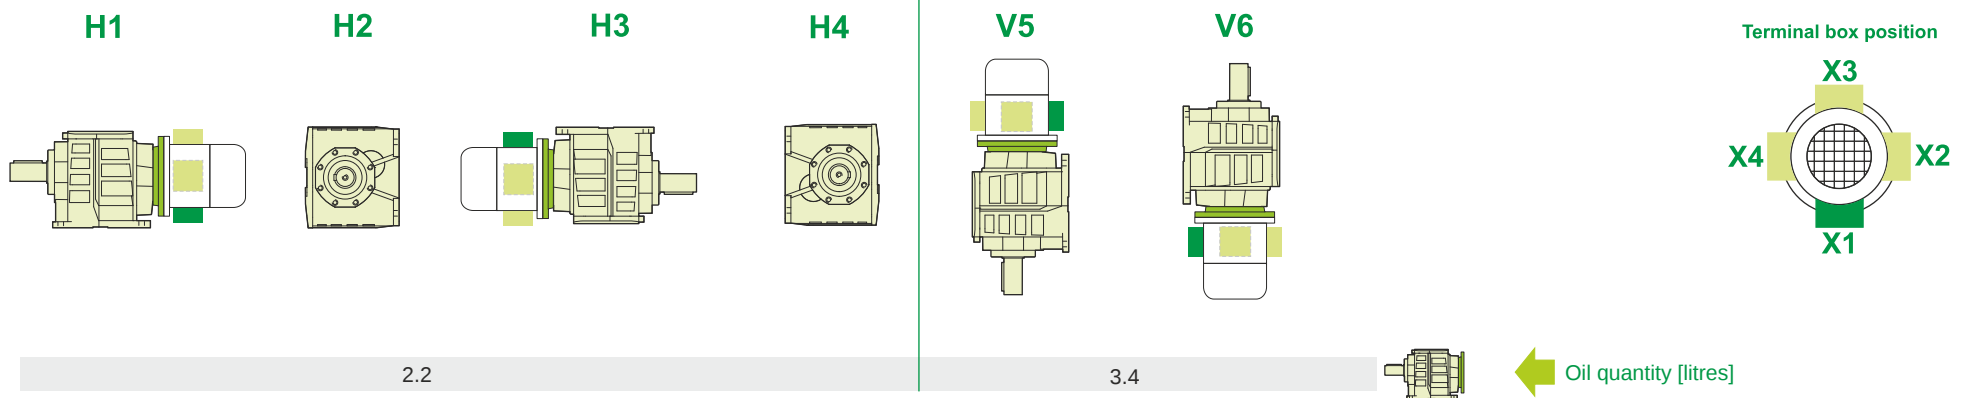

Lubricant type: Long life synthetic oil ISO VG320

**Direction of rotation**



**Weight**

Gear unit [kg]	21.5
Electric motor [kg]	9.8

**M RD 43 B3 H1 124.13 80 B14 AU 40x80 MT 0.75 kW 80 B4 B14 X3**