

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	546.88
Ratio (i=)		2.56
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	22
Service factor		1.7
Rated Power P1	[kW]	37.56

Output data

Gear unit	M RD 52 B3 H1 2.56 180 B5 AU 40x80 MT 22 kW 180 L4 B5 X3	
------------------	---	--

Type		RD - Helical gearboxes
Input type		M
Size		52
Ratio (i=)		2.56
Input flange		B5
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	546.88
Rated output torque	[Nm]	368.82
Service Factor		1.7
Efficiency		0.96
Inertia moment	[kgm ²]	0.002613

Gear unit configuration

Fixing		Feet
Output shaft		AU 40x80

Output radial and axial loads


Output radial load	[N]	3400
Output axial load	[N]	680

Electric motor

Size		180 L4
Poles		4
Power	[kW]	22


Electric motor configuration

Motor flange		B5
Terminal box position		X3

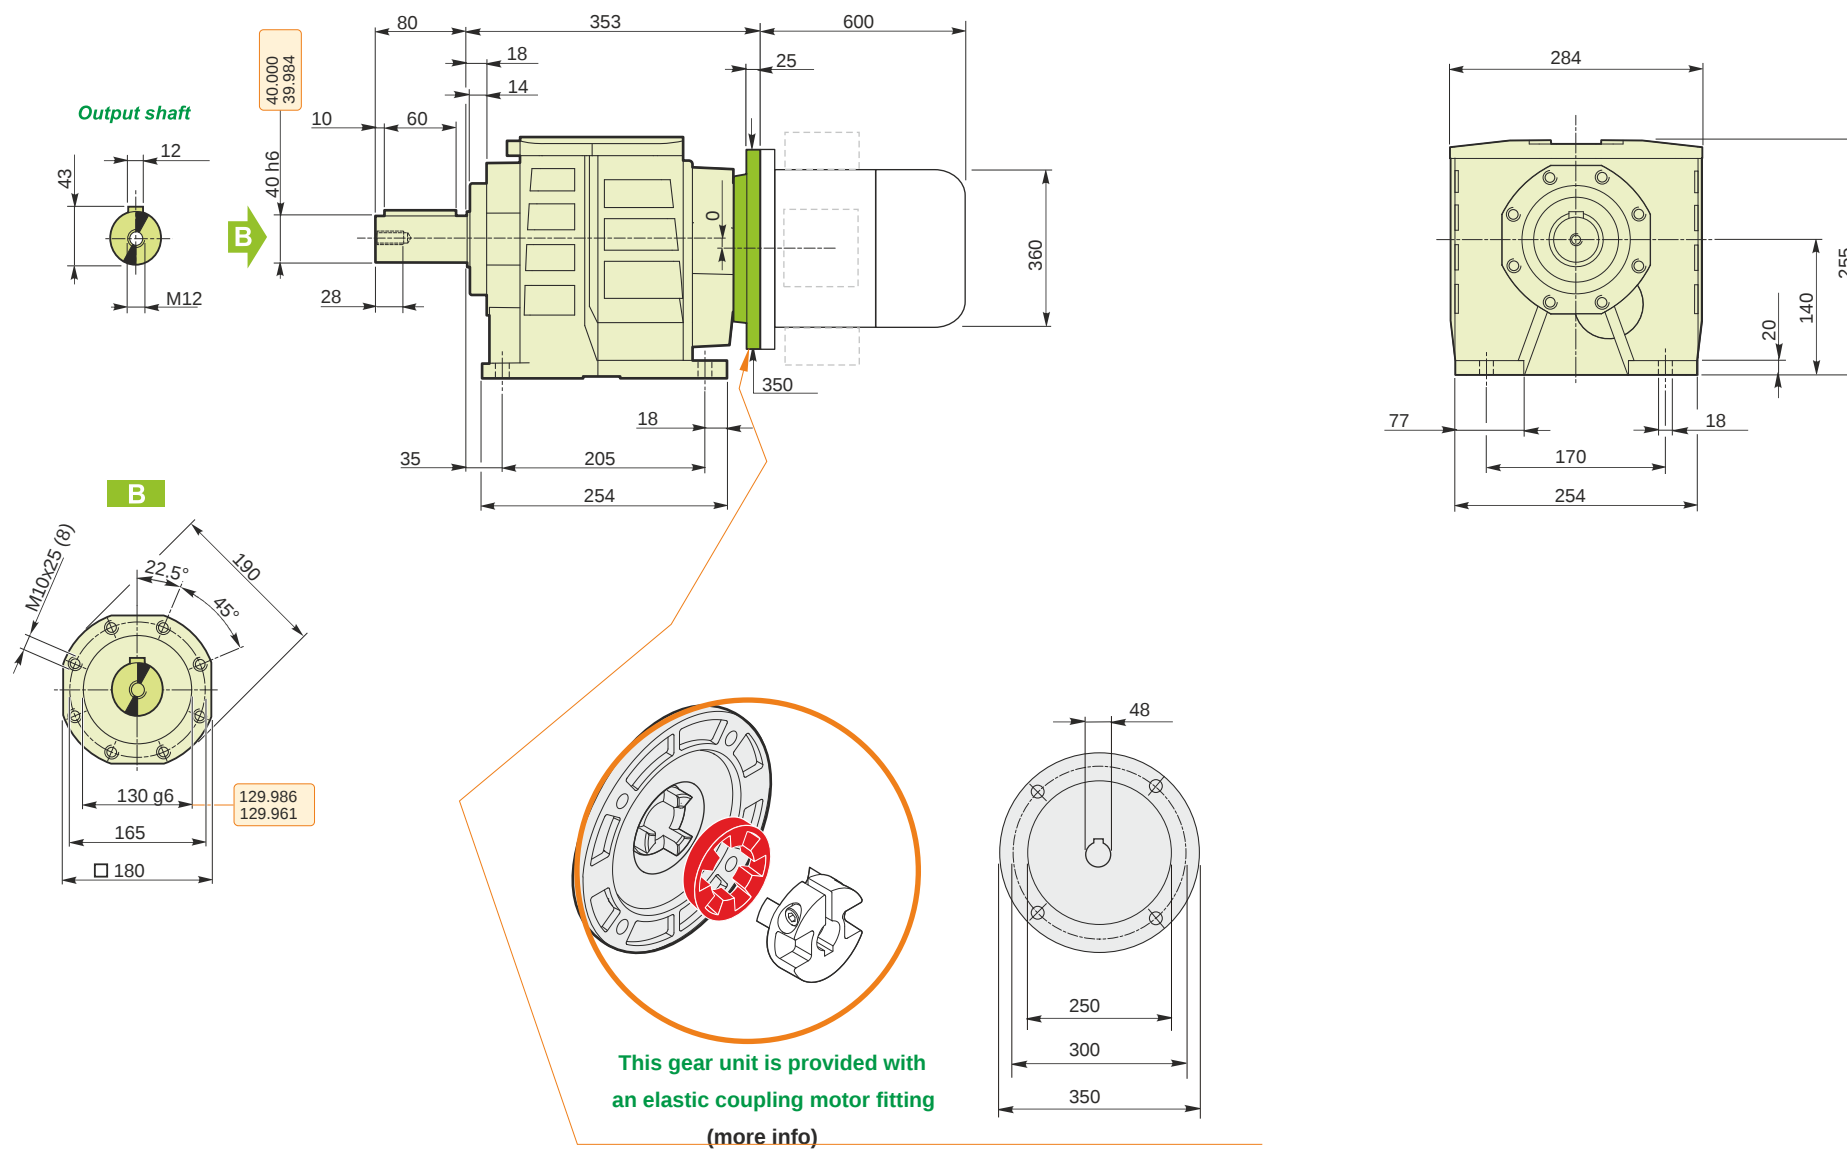

M RD 52 B3 H1 2.56 180 B5 AU 40x80 MT 22 kW 180 L4 B5 X3

Mounting positions

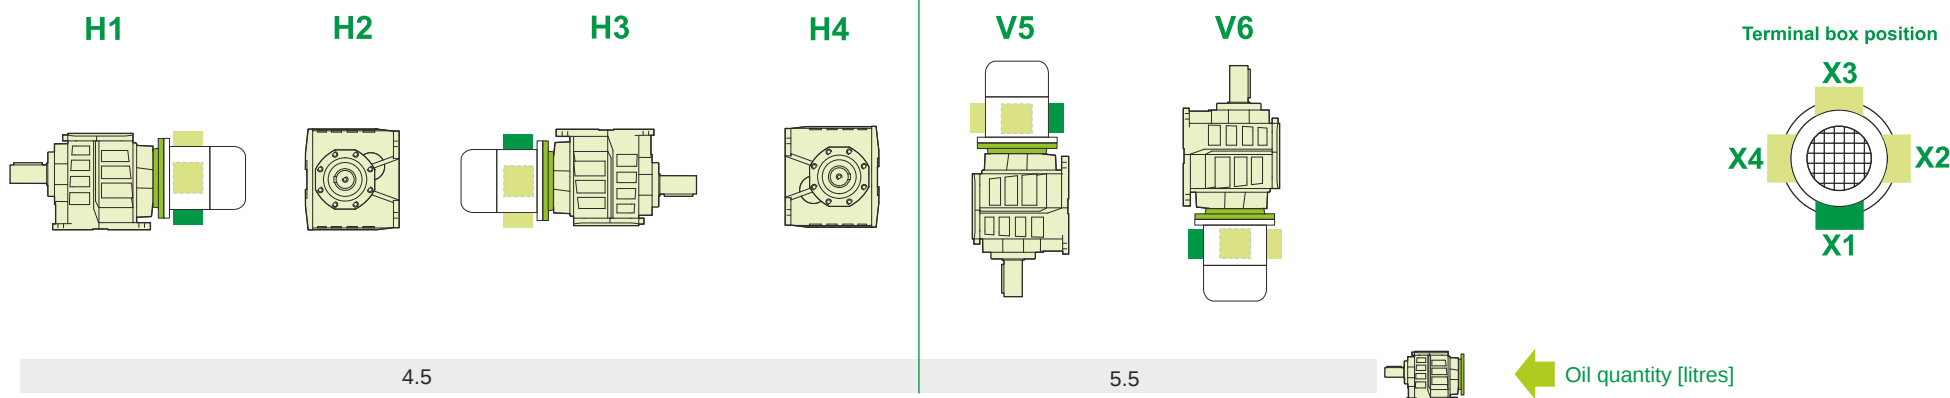

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	49
Electric motor [kg]	135

M RD 52 B3 H1 2.56 180 B5 AU 40x80 MT 22 kW 180 L4 B5 X3