

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	289.26
Ratio (i=)		4.84
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	22
Service factor		1.2
Rated Power P1	[kW]	26.81

Output data

Gear unit **M RD 52 B3 H1 4.84 180 B5 AU 40x80 MT 22 kW 180 L4 B5 X3**

Type		RD - Helical gearboxes
Input type		M
Size		52
Ratio (i=)		4.84
Input flange		B5
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	289.26
Rated output torque	[Nm]	697.29
Service Factor		1.2
Efficiency		0.96
Inertia moment	[kgm ²]	0.001513

Gear unit configuration

Fixing		Feet
Output shaft		AU 40x80

Output radial and axial loads


Output radial load	[N]	4500
Output axial load	[N]	900

Electric motor

Size		180 L4
Poles		4
Power	[kW]	22


Electric motor configuration

Motor flange		B5
Terminal box position		X3

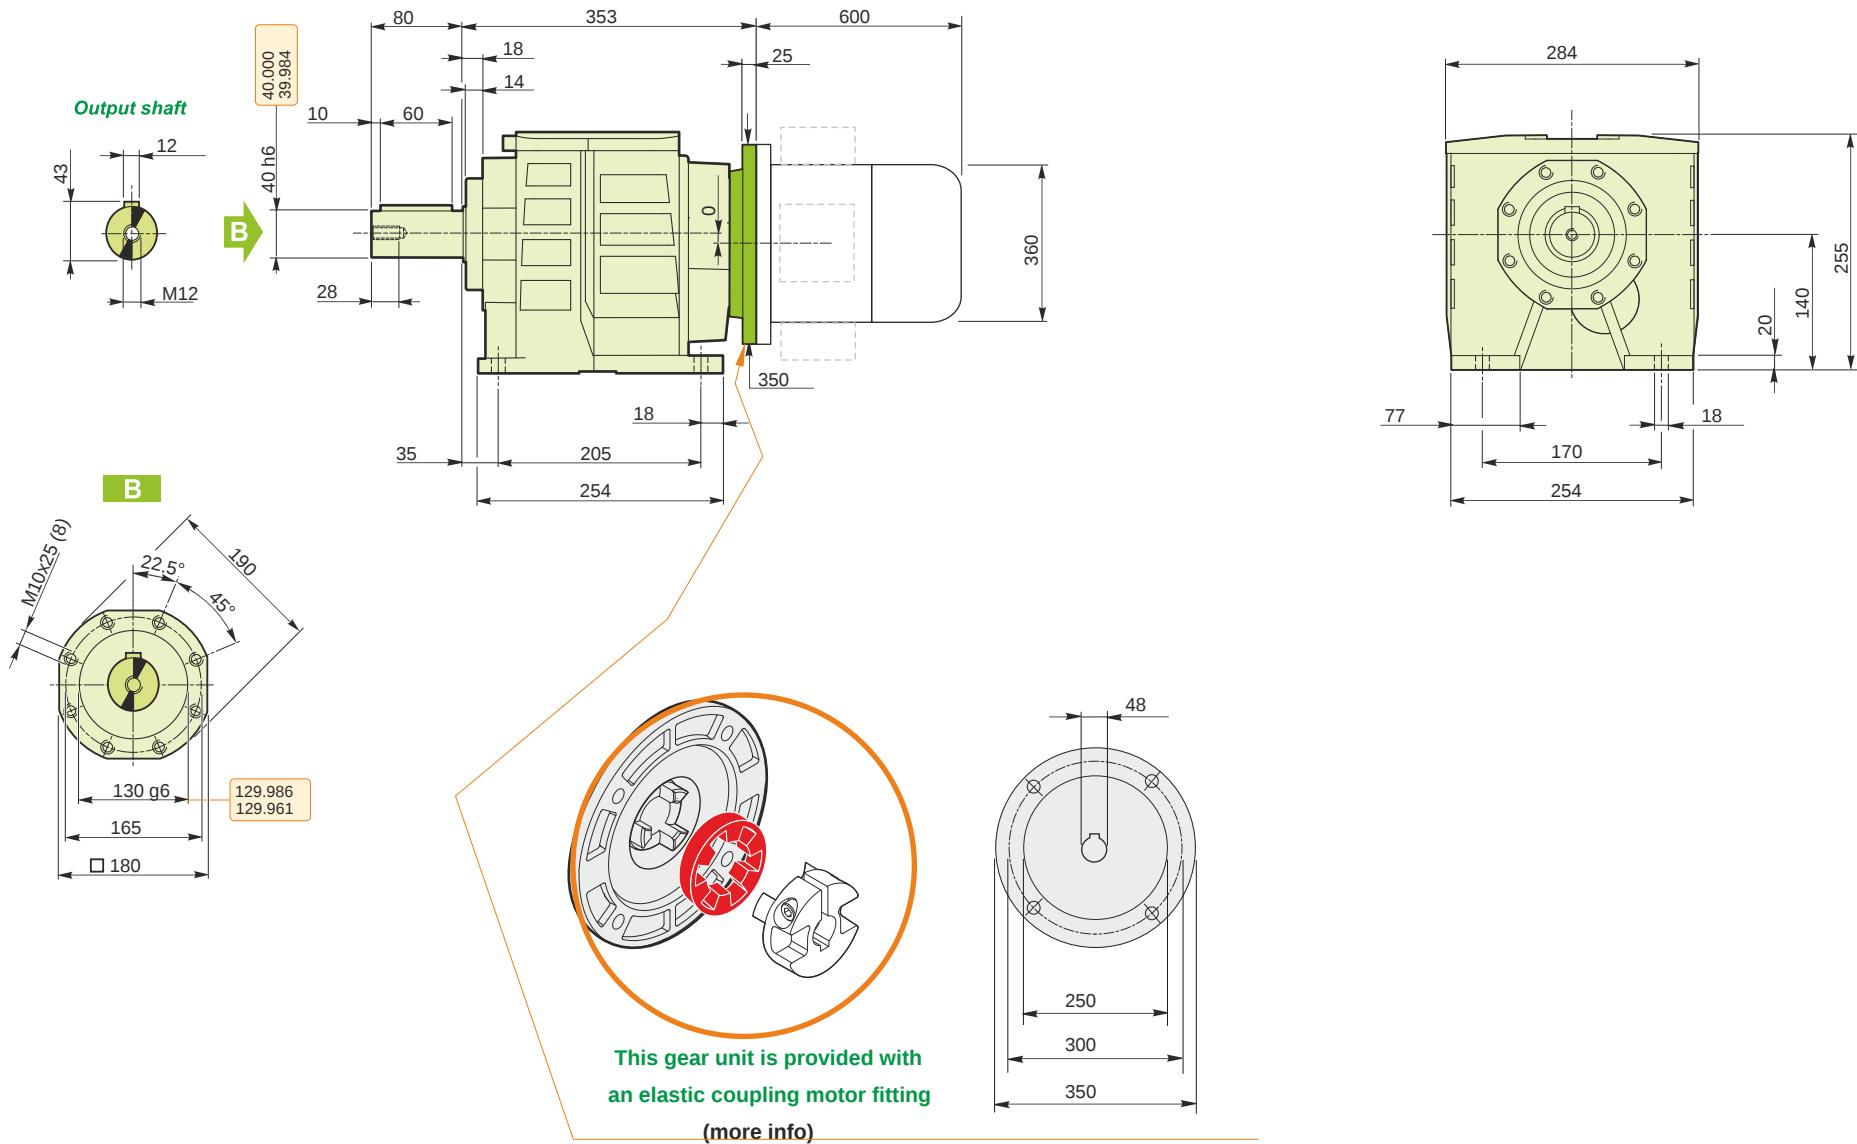

M RD 52 B3 H1 4.84 180 B5 AU 40x80 MT 22 kW 180 L4 B5 X3

Mounting positions

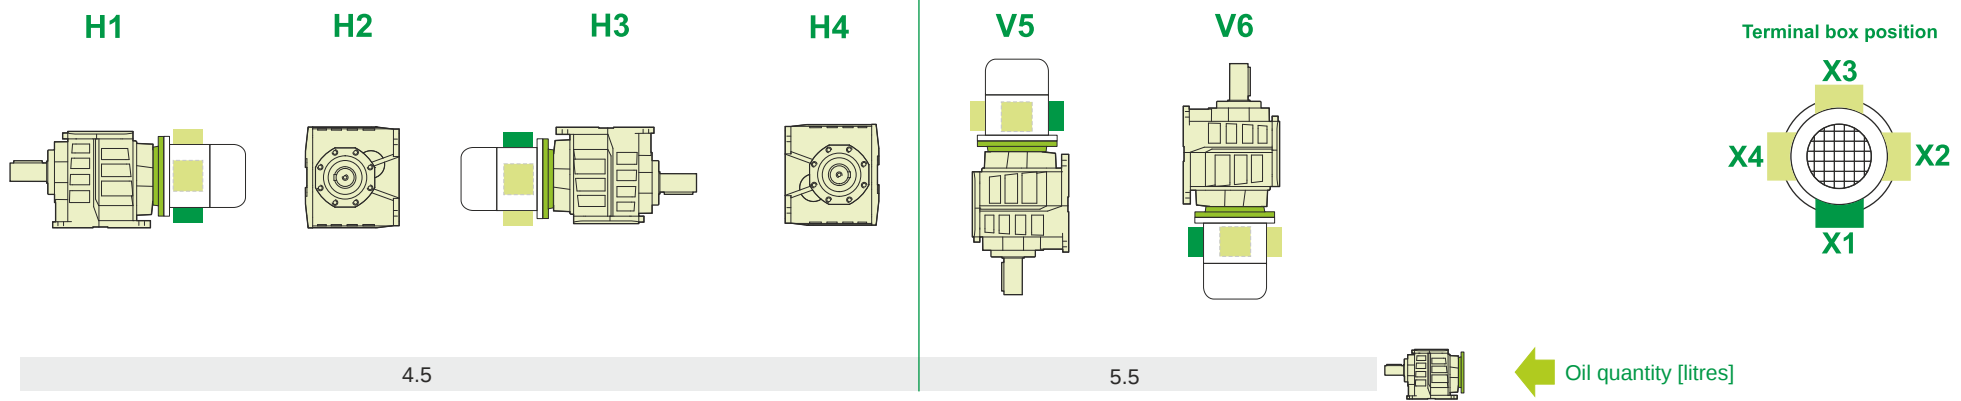

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	49
Electric motor [kg]	135

M RD 52 B3 H1 4.84 180 B5 AU 40x80 MT 22 kW 180 L4 B5 X3