

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	114.57
Ratio (i=)		12.22
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	15
Service factor		1
Rated Power P1	[kW]	14.86

Output data

Gear unit **M RD 52 B3 H1 12.22 160 B5 AU 40x80 MT 15 kW 160 L4 B5 X3**

Type		RD - Helical gearboxes
Input type		M
Size		52
Ratio (i=)		12.22
Input flange		B5
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	114.57
Rated output torque	[Nm]	1200.35
Service Factor		1
Efficiency		0.96
Inertia moment	[kgm ²]	0.001326

Gear unit configuration

Fixing		Feet
Output shaft		AU 40x80

Output radial and axial loads


Output radial load	[N]	6900
Output axial load	[N]	1380

Electric motor

Size		160 L4
Poles		4
Power	[kW]	15


Electric motor configuration

Motor flange		B5
Terminal box position		X3

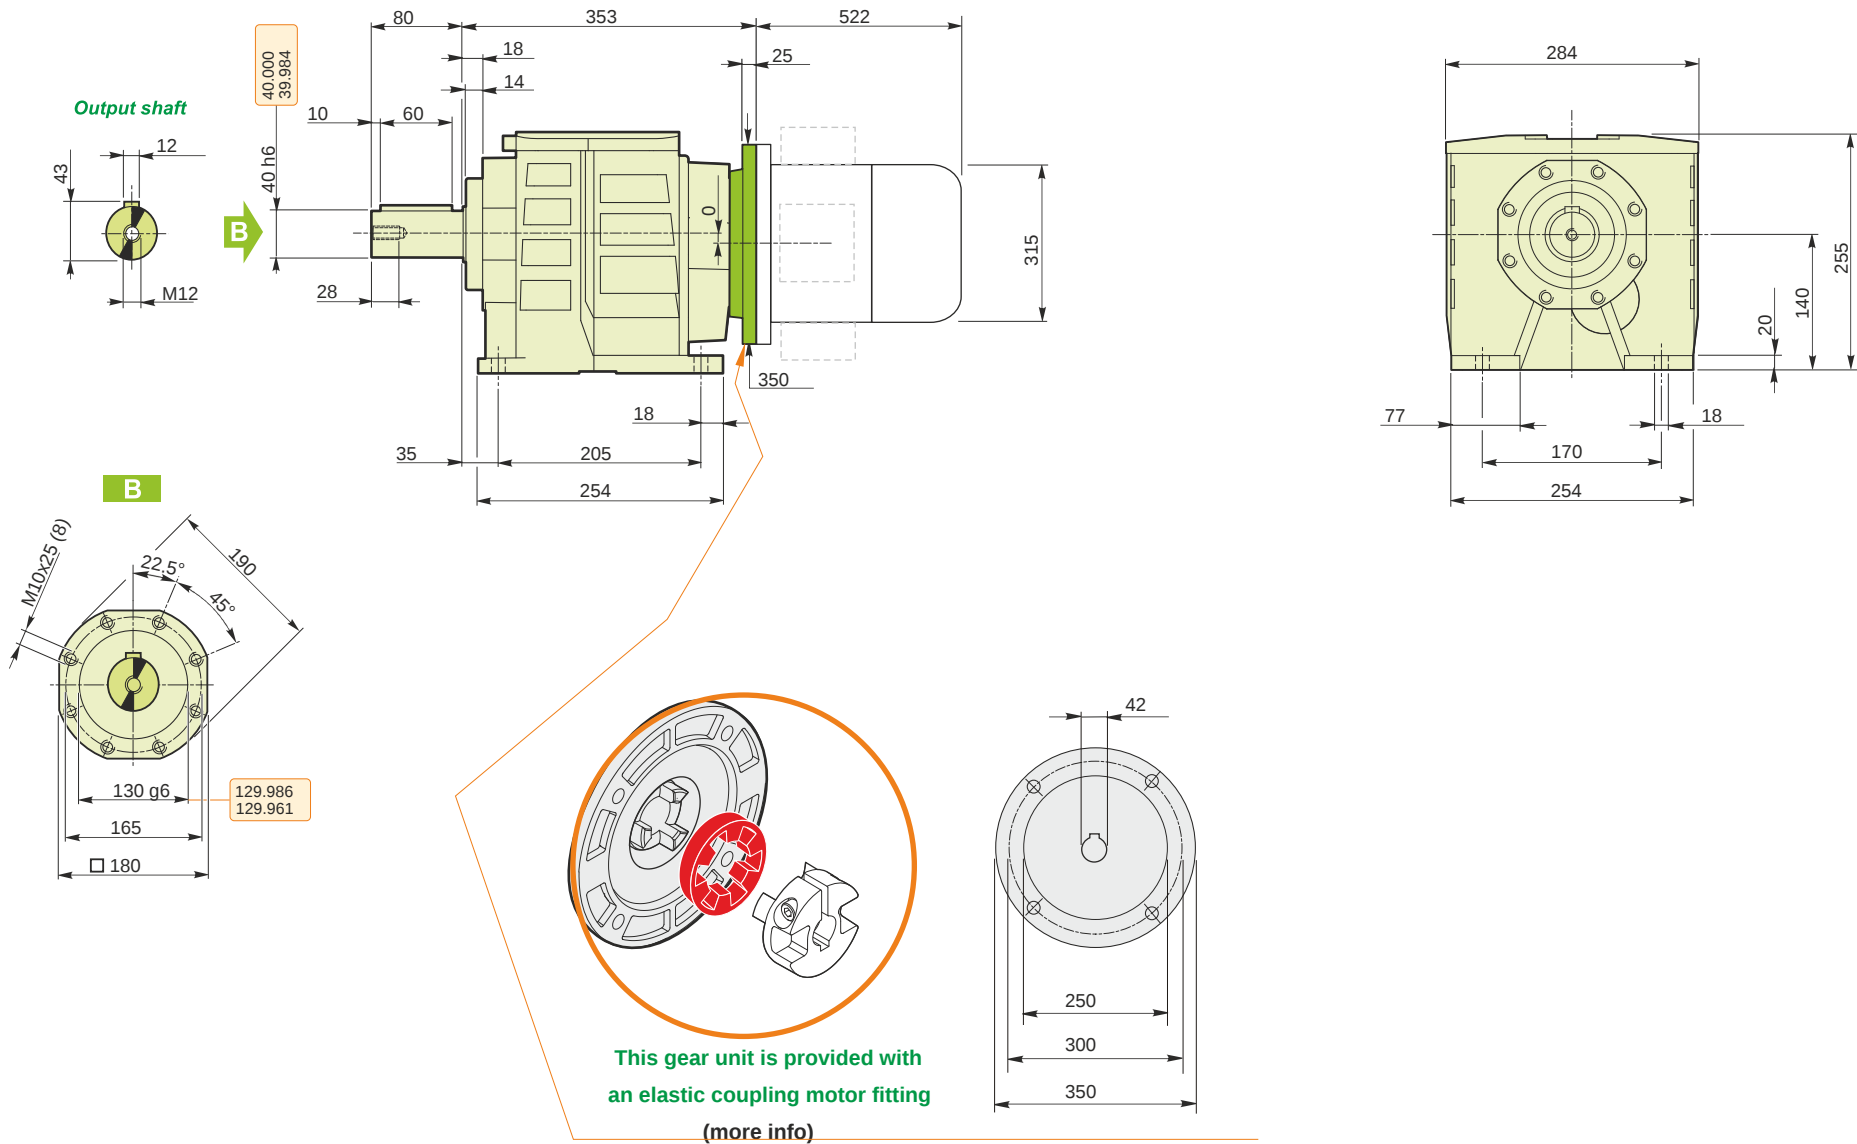


M RD 52 B3 H1 12.22 160 B5 AU 40x80 MT 15 kW 160 L4 B5 X3

Mounting positions

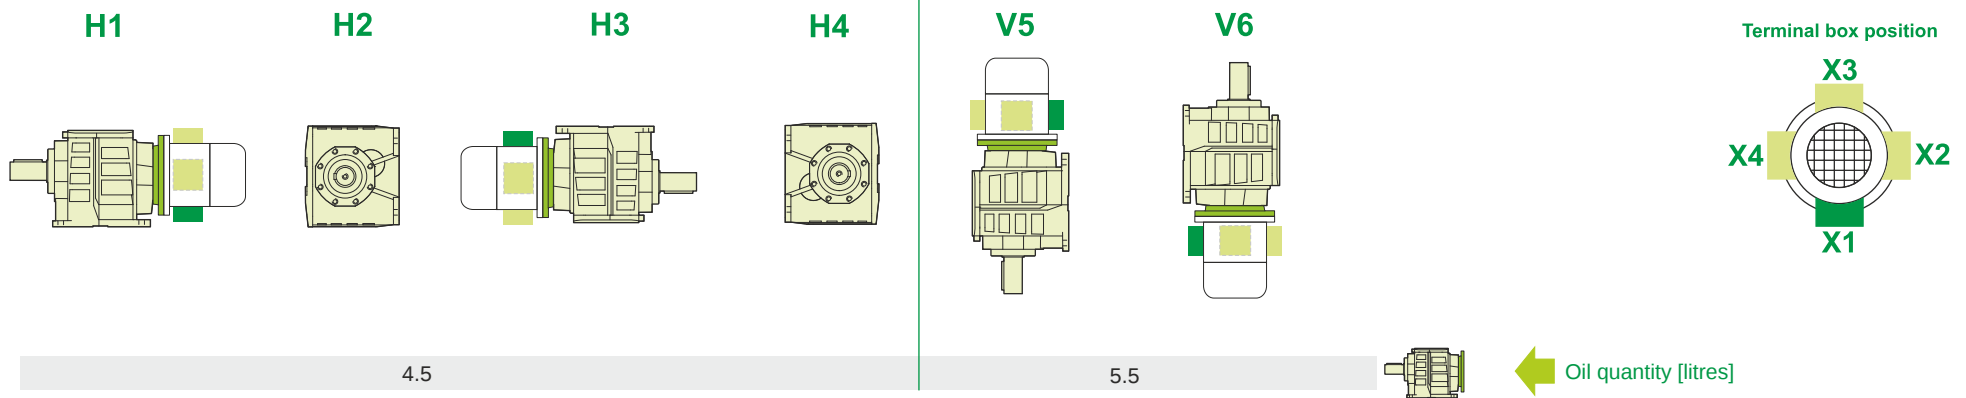

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

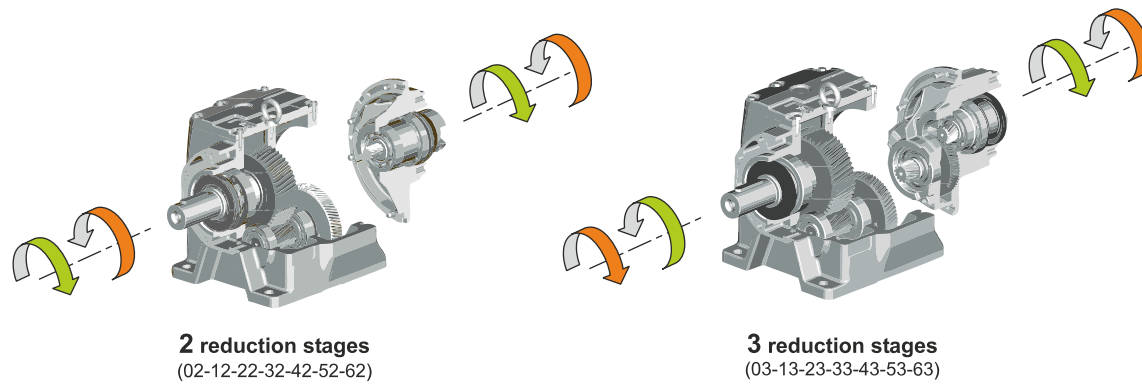

Weight

Gear unit [kg]	49
Electric motor [kg]	100

M RD 52 B3 H1 12.22 160 B5 AU 40x80 MT 15 kW 160 L4 B5 X3