

### Input data

|                       |       |            |
|-----------------------|-------|------------|
| System of measurement |       | Metric     |
| Input type            |       | Gear motor |
| Input speed           | [rpm] | 1400       |
| Output speed          | [rpm] | 67.63      |
| Ratio (i=)            |       | 20.7       |
| Frequency             | [Hz]  | 50         |
| Input options         |       | IEC        |
| Requested input power | [kW]  | 15         |
| Service factor        |       | 1          |
| Rated Power P1        | [kW]  | 15.49      |

### Output data

|                  |                                                                  |
|------------------|------------------------------------------------------------------|
| <b>Gear unit</b> | <b>M RD 62 B3 H1 20.7 160 B5 AU 50x100 MT 15 kW 160 L4 B5 X3</b> |
|------------------|------------------------------------------------------------------|

|                     |                     |                        |
|---------------------|---------------------|------------------------|
| Type                |                     | RD - Helical gearboxes |
| Input type          |                     | M                      |
| Size                |                     | 62                     |
| Ratio (i=)          |                     | 20.7                   |
| Input flange        |                     | B5                     |
| Mounting position   |                     | H1                     |
| Input speed         | [rpm]               | 1400                   |
| Output speed        | [rpm]               | 67.63                  |
| Rated output torque | [Nm]                | 2033.33                |
| Service Factor      |                     | 1                      |
| Efficiency          |                     | 0.96                   |
| Inertia moment      | [kgm <sup>2</sup> ] | 0.002948               |

#### Gear unit configuration

|              |  |           |
|--------------|--|-----------|
| Fixing       |  | Feet      |
| Output shaft |  | AU 50x100 |

#### Output radial and axial loads


|                    |     |       |
|--------------------|-----|-------|
| Output radial load | [N] | 13000 |
| Output axial load  | [N] | 2600  |

#### Electric motor

|       |      |        |
|-------|------|--------|
| Size  |      | 160 L4 |
| Poles |      | 4      |
| Power | [kW] | 15     |


#### Electric motor configuration

|                       |  |    |
|-----------------------|--|----|
| Motor flange          |  | B5 |
| Terminal box position |  | X3 |

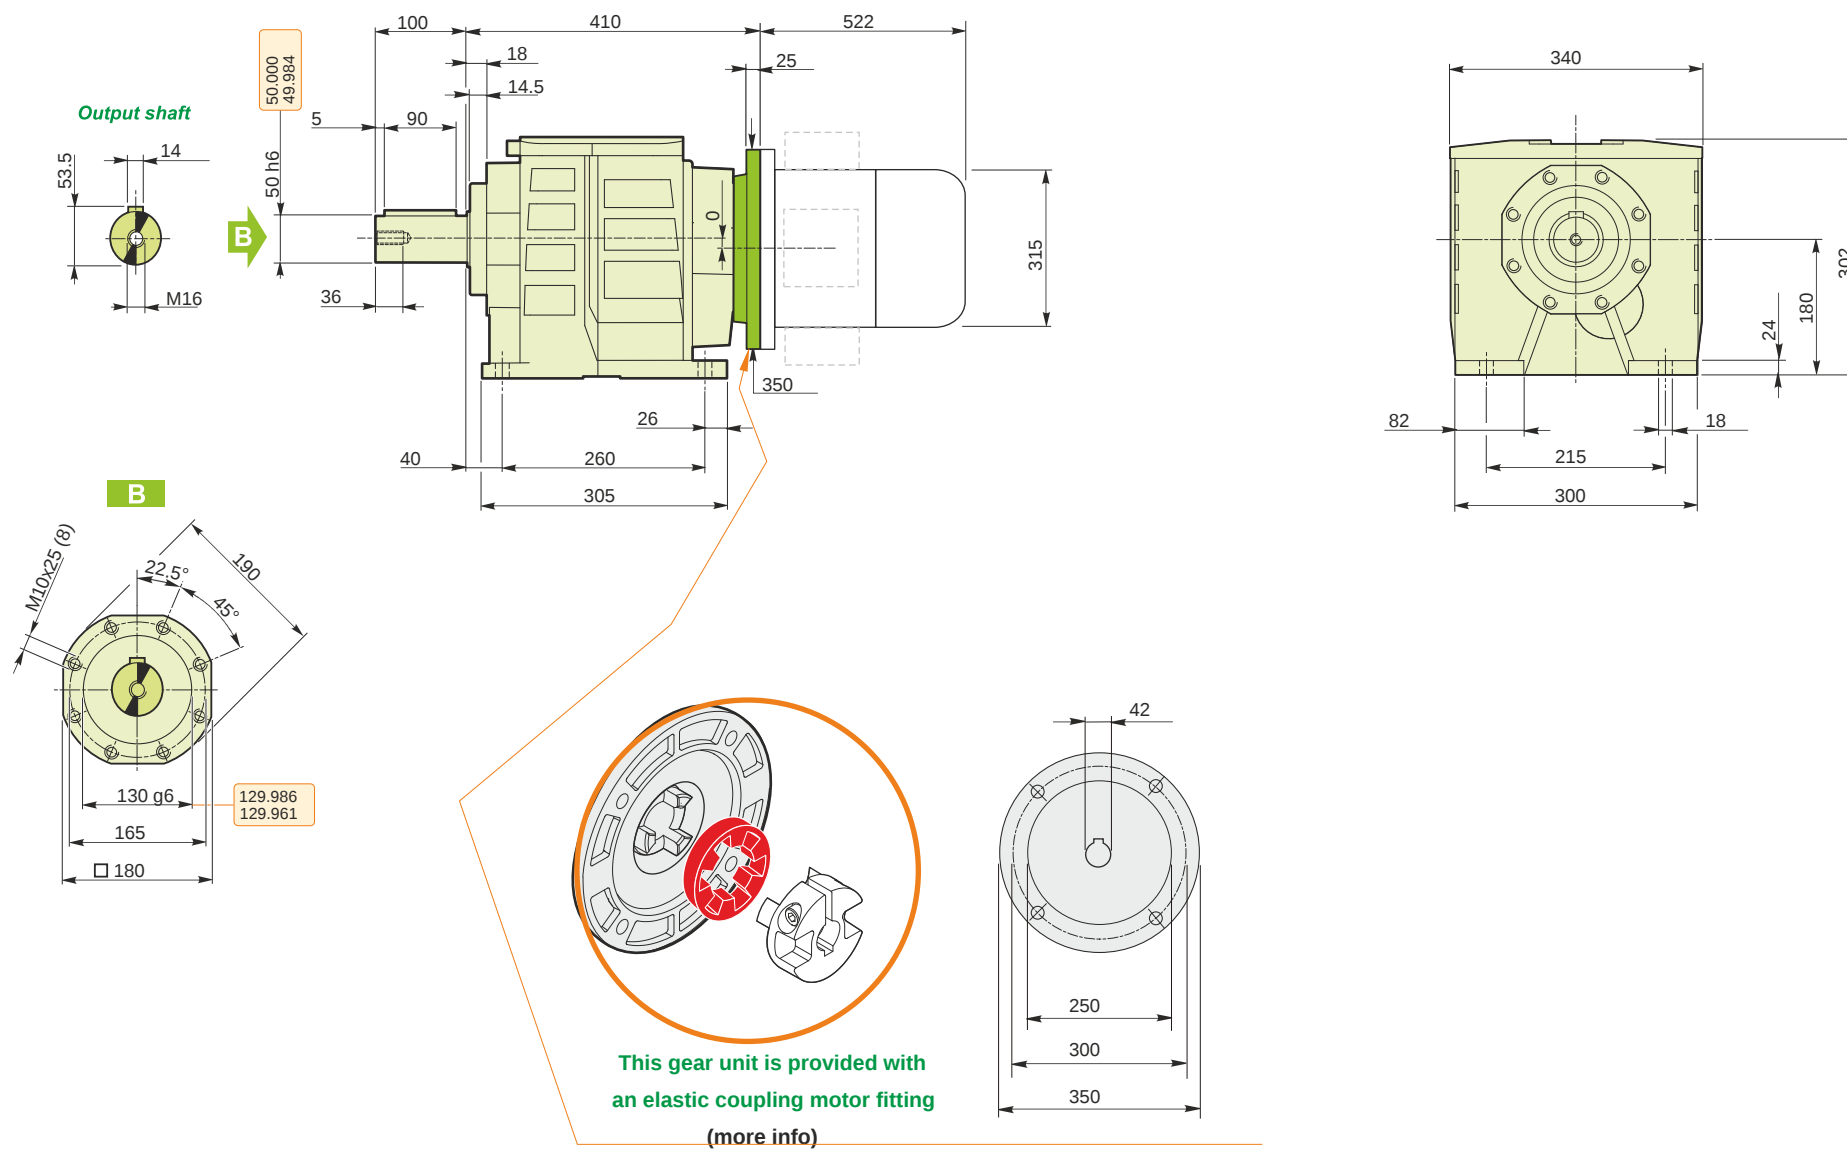

**M RD 62 B3 H1 20.7 160 B5 AU 50x100 MT 15 kW 160 L4 B5 X3**

## Mounting positions

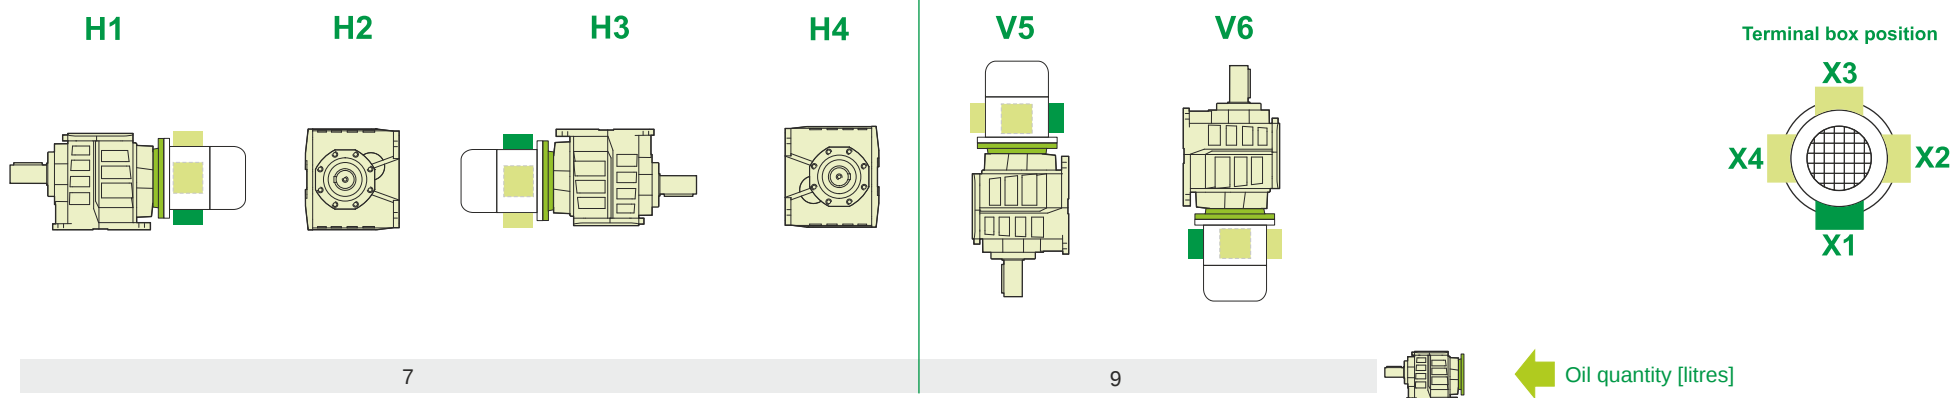

Lubricant type: Long life synthetic oil ISO VG320

## Direction of rotation



## Weight

|                     |     |
|---------------------|-----|
| Gear unit [kg]      | 62  |
| Electric motor [kg] | 100 |

**M RD 62 B3 H1 20.7 160 B5 AU 50x100 MT 15 kW 160 L4 B5 X3**