

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	56.89
Ratio (i=)		24.61
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	9.2
Service factor		1.4
Rated Power P1	[kW]	13.03

Output data

Gear unit **M RD 62 B3 H1 24.61 132 B14 AU 50x100 MT 9.2 kW 132 ML4 B14 X3**

Type		RD - Helical gearboxes
Input type		M
Size		62
Ratio (i=)		24.61
Input flange		B14
Mounting position		H1
Input speed	[rpm]	1400
Output speed	[rpm]	56.89
Rated output torque	[Nm]	1482.68
Service Factor		1.4
Efficiency		0.96
Inertia moment	[kgm ²]	0.002819

Gear unit configuration

Fixing		Feet
Output shaft		AU 50x100

Output radial and axial loads


Output radial load	[N]	13500
Output axial load	[N]	2700

Electric motor

Size		132 ML4
Poles		4
Power	[kW]	9.2


Electric motor configuration

Motor flange		B14
Terminal box position		X3

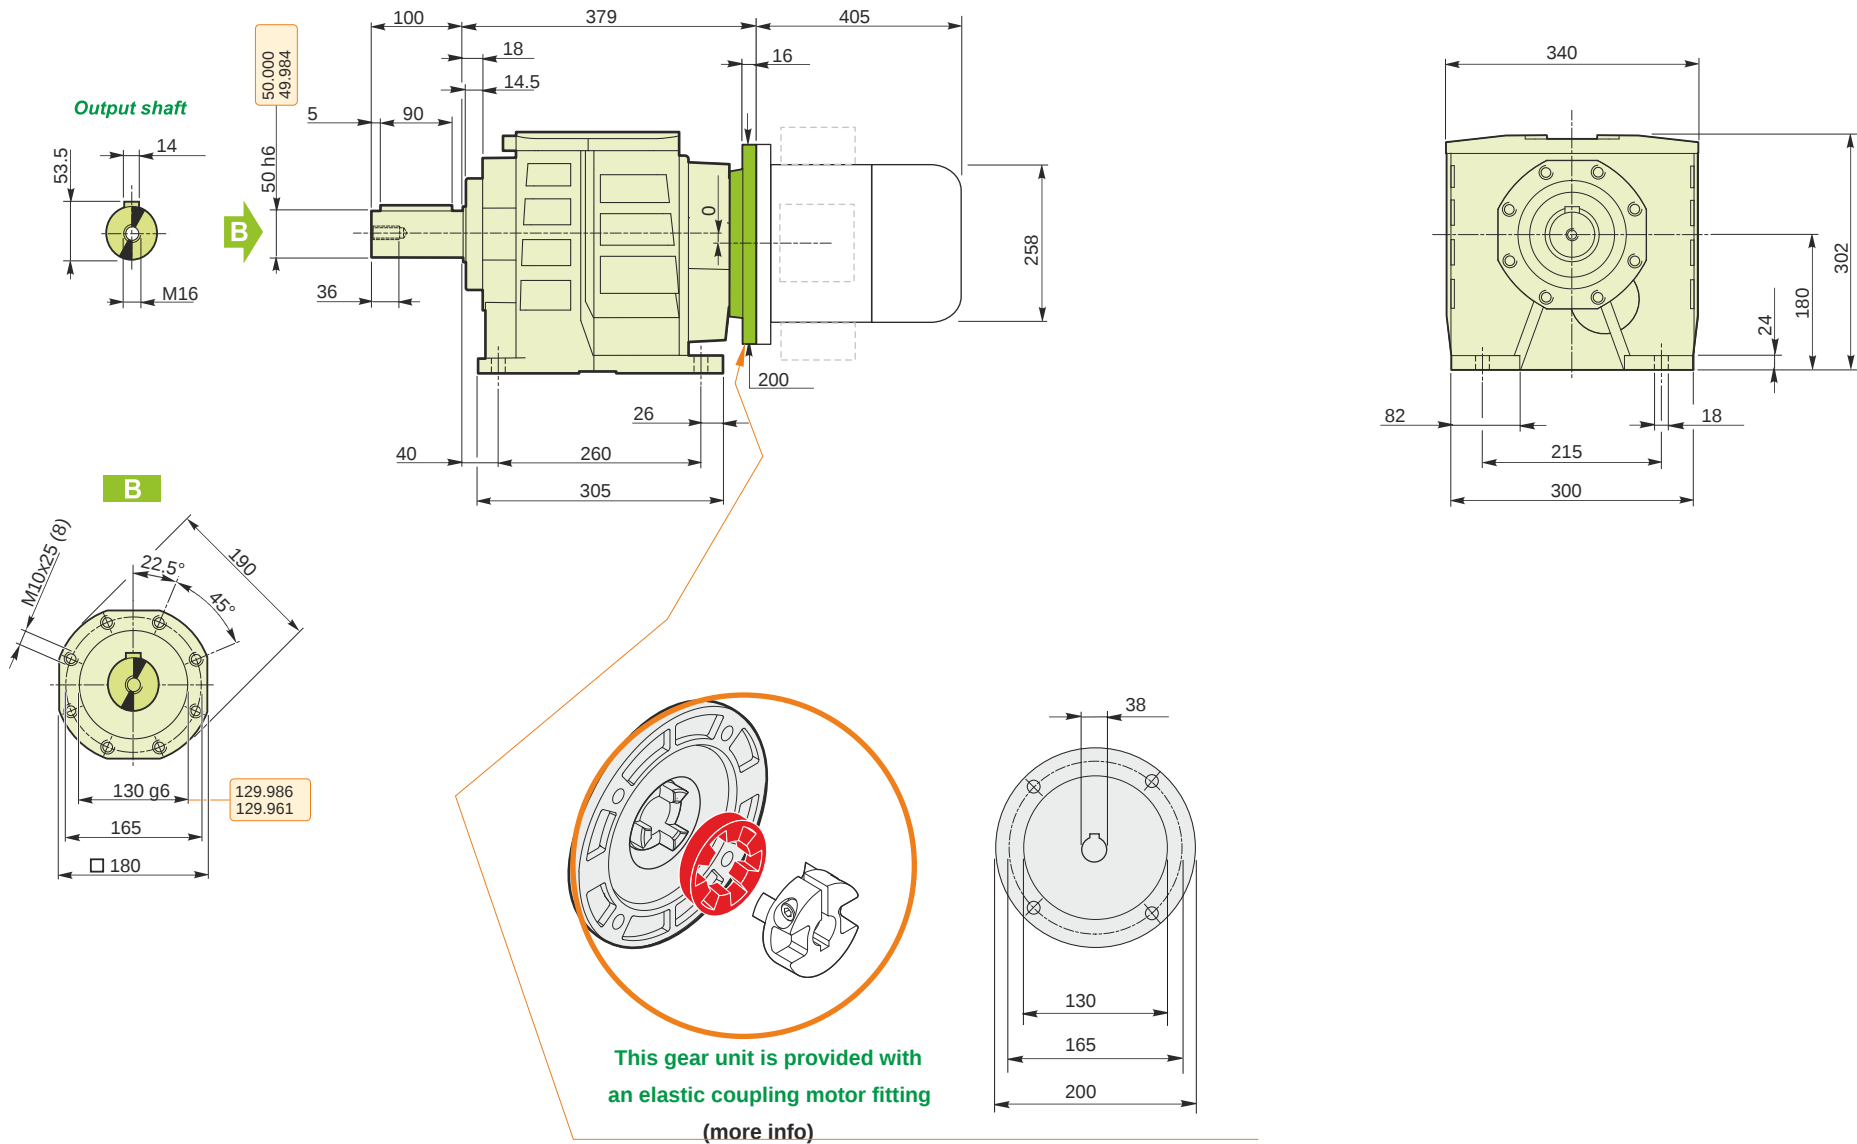

M RD 62 B3 H1 24.61 132 B14 AU 50x100 MT 9.2 kW 132 ML4 B14 X3

Mounting positions

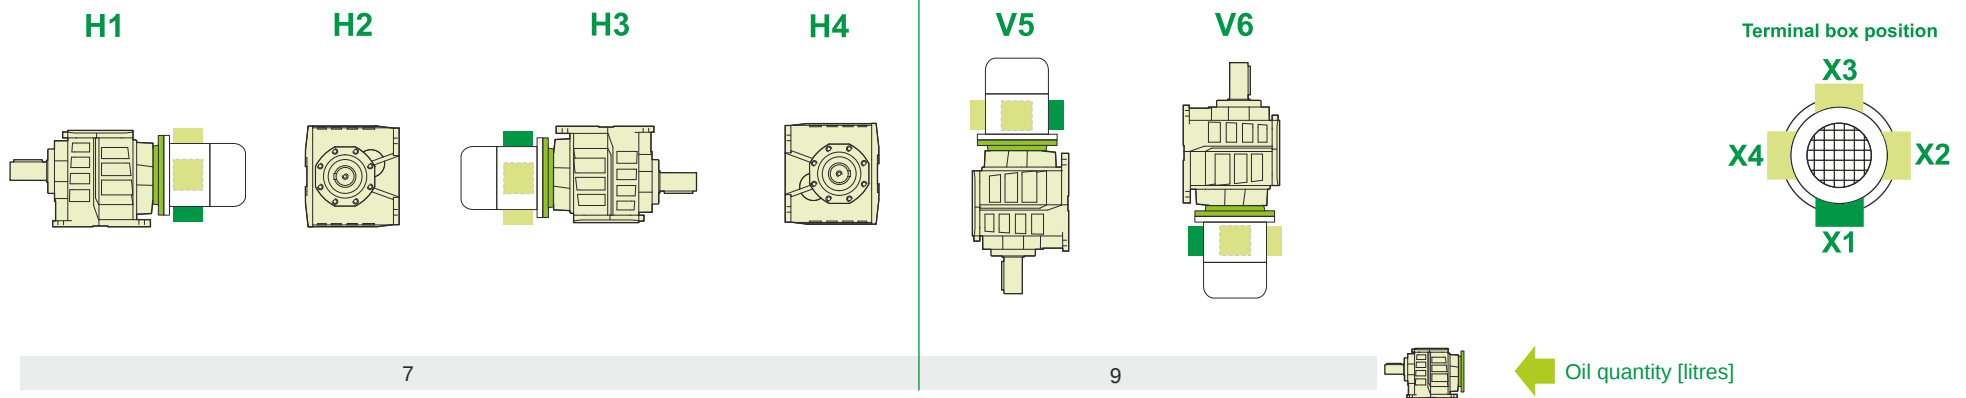

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	62
Electric motor [kg]	52

M RD 62 B3 H1 24.61 132 B14 AU 50x100 MT 9.2 kW 132 ML4 B14 X3